


Most GA/BA aircraft now exempt from Europe's 2020 Datalink Mandate

David Mumford
5 February, 2020

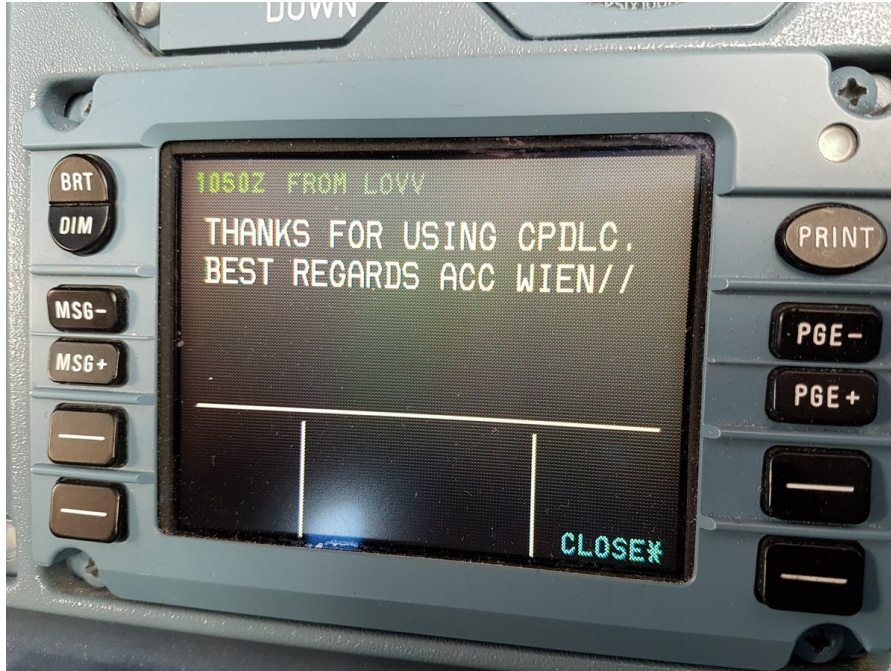

Europe's datalink mandate takes effect today - 5th Feb 2020!

The original plan was that datalink would be required for all aircraft operating in Europe above FL285 from this date, but then the EU announced that this would **not be required for several categories of aircraft**, the main two being:

- Aircraft with a certificate of airworthiness first issued before 1 Jan 2018 and fitted prior to this date with FANS 1/A.
- Aircraft with 19 seats or less and a MTOW of 45359 kg (100000 lbs) or less, with a first individual certificate of airworthiness issued before 5 Feb 2020.

In other words - **most GA/BA aircraft!** (You can read the rule here - latest version in 2023).

Added to that, in early Decemebrr 2019 the EU Commission approved plans to pass an additional resolution that makes a bunch of other aircraft exempt too:

Aircraft permanently exempt:

- Aircraft in Annex I
- Aircraft in Annex II with a CofA issued before 5 Feb 2020

Aircraft which have up to 5 Feb 2022 to do the avionics retrofit:

- Aircraft in Annex II with a CofA issued after 5 Feb 2020

- Aircraft in Annex III

On Feb 3, EASA issued a Bulletin which says that operators who are **exempt from the mandate** should include the letter “Z” in Field 10 and the indicator “DAT/CPDLCX” in Field 18 of their flight plan. If you don’t, ATC won’t know you’re exempt, and you may struggle to fly above FL285!

Bottom line, for operators who are exempt from the mandate, these flights should not be restricted to the lower flight levels below FL285. Logged-on traffic might just get better directs and faster climbs, that’s all.

It should be noted that the Datalink Mandate is not the same thing as the **Logon List**. The Logon List is the thing you need to get registered on if you want to get CPDLC when flying in Maastricht, France, Switzerland and Portugal. And it only applies to ATN CPDLC aircraft. If you’ve only got FANS1/A, Maastricht will let you log on, but France, Switzerland and Portugal will not.

The Backstory...


This mandate was actually supposed to come into force back in **Feb 2015**, but got delayed to Feb 2020 due to technical issues with the system, particularly disconnections, known as **‘provider aborts’** – which is where an aircraft loses datalink connection with the ground for more than six minutes.

The high amount of these provider aborts has led some sectors (Maastricht UAC, France, Switzerland, and Portugal) to implement the Logon List (formerly known as the “White List”), which effectively means that CPDLC is **only** provided to those aircraft with avionics that are known to suffer a lower provider abort rate. The Logon List only applies to ATN B1 equipped aircraft, not those with FANS1/A – Maastricht are planning to introduce a similar list for FANS1/A aircraft at some point in the future, to ensure that only aircraft that have the latency timer feature will be able to log on.

In their original postponement of the mandate back in 2015, the EU said the following:

“This excessive rate of random provider aborts causes a degradation in the network performance potentially presenting aviation safety risks by increasing the pilots and controllers’ workload and creating confusion leading to a loss of situational awareness.”

Their goal was to get the number of provider aborts down to 1 per 100 flight hours. By mid-2018, the number had dropped to a rate of 4.4 per 100 flight hours, and data from this year has that figure down to 3.9 per 100.

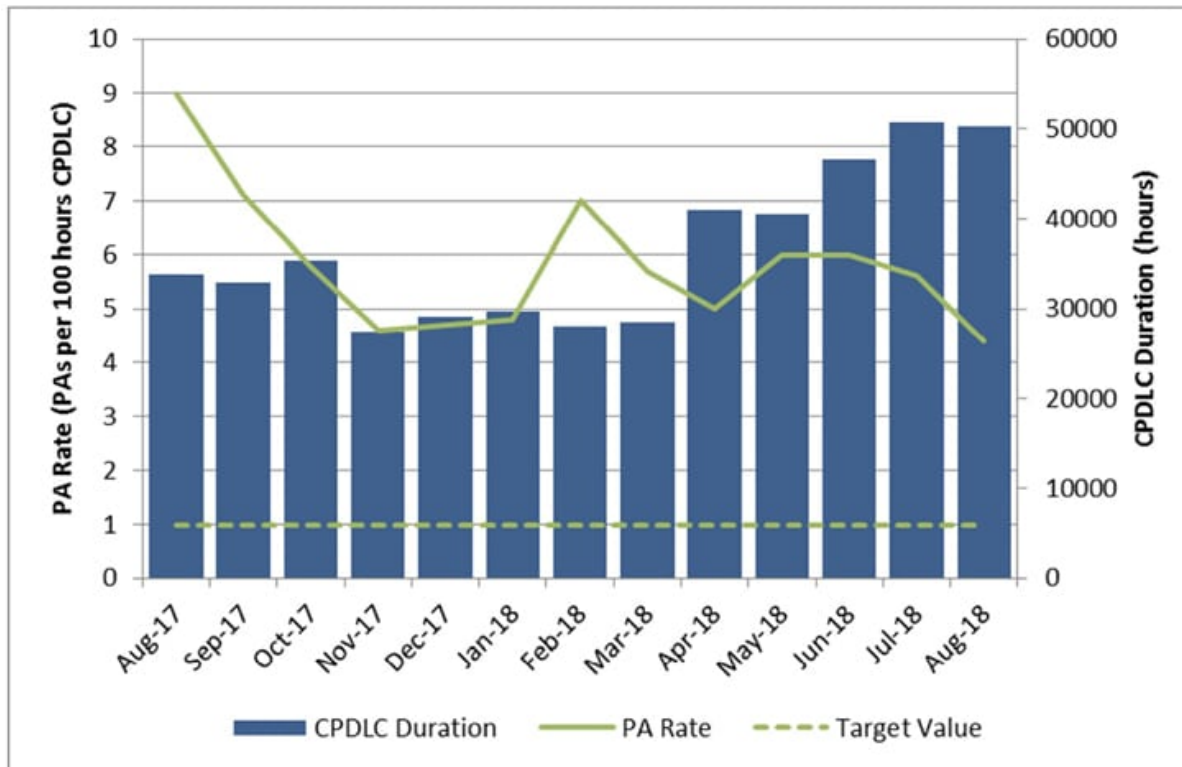

Added to that, they wanted to get at least 75% of flights across the network filing with datalink. Current data suggests this is still lingering at around the 40% mark. So if the datalink mandate had been implemented as planned in Feb 2020 **without** these new exemptions, that would have meant that approximately 60% of the traffic would have been **restricted to below FL290!**

As the EU make clear in their new ruling, that is ultimately why the new raft of exemptions has now been brought in, ahead of the Feb 2020 mandate:

"Acknowledging the ongoing data link implementation issues and corrective actions taken and recognising the objective that at least 75 % of the flights should be equipped with data link capability, the criteria for exemptions should be amended. Those criteria should remain effective, without placing an undue economic burden on specific operator categories which contribute significantly less to the overall number of flights. Such categories should include operators of aircraft with Future Air Navigation Systems (FANS) 1/A systems installed, operators of older aircraft, and of aircraft designed to carry 19 passengers or less."

Ultimately, when the datalink mandate comes in on 5 Feb 2020, it now looks like most GA/BA aircraft will be exempt from this, meaning that those without CPDLC will be able to **continue to operate above FL285.**

Thanks to the European Business Aviation Association for their help with this article!

Article header photo by @Zelgomat


Business aviation prepares for the Miami Super Bowl

Diogene De Souza
5 February, 2020



Everyone loves a huge sporting event like the Super Bowl – it usually even includes a fly-over! But, if you're operating in or around Miami next weekend, the last thing you want is a flag on the play...

Super Bowl LIV is happening in Miami on Sunday, 2 February 2020, and will attract a lot of attention – some in the form of intensified aircraft operations in the vicinity of the venue. As a designated National Security Special Event, a variety of **restrictions and special procedures are in place between 25 January - 04 February 2020**, most significantly a TFR centred on the stadium on gameday.

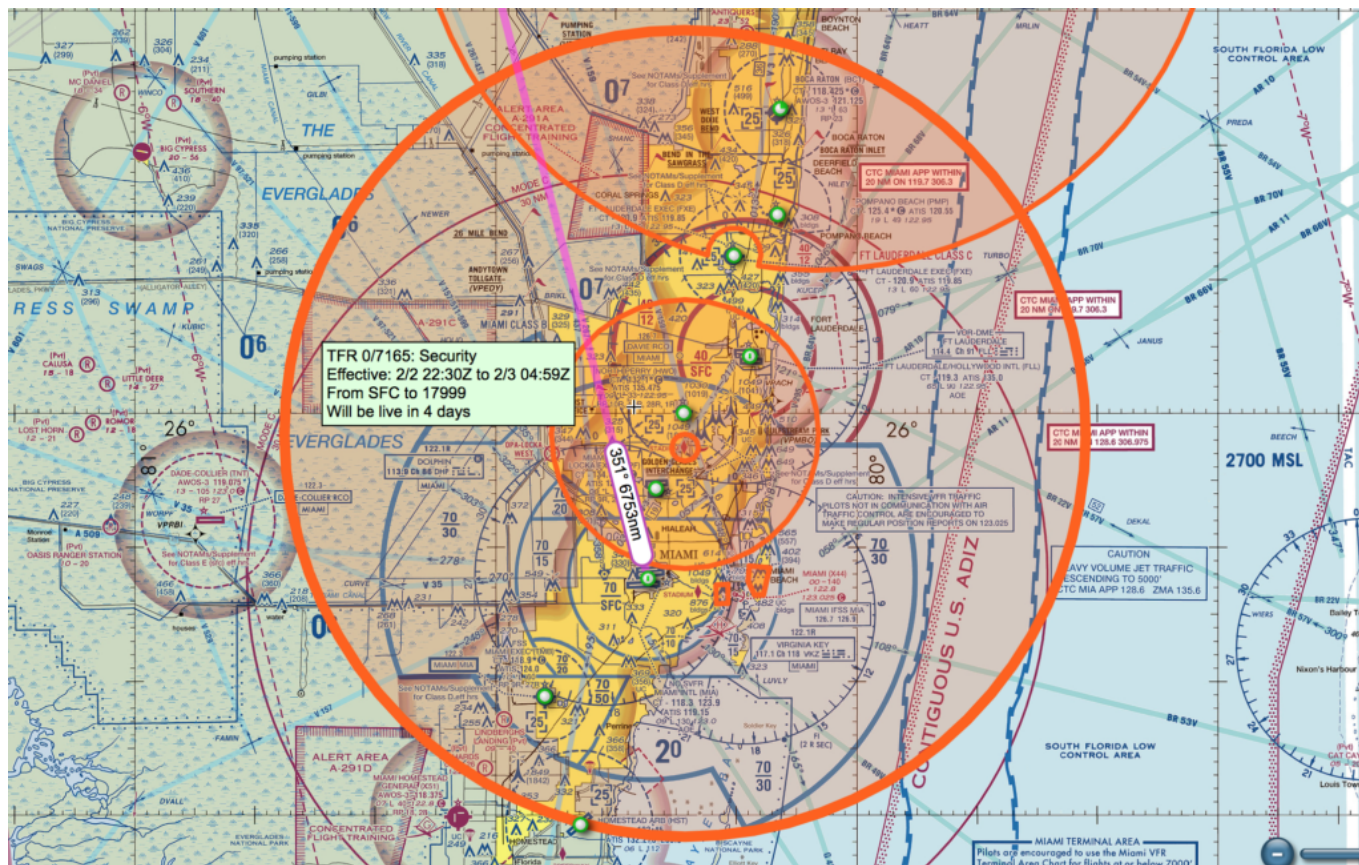

Whether you are arriving, transiting, or departing the area, here are **five key things** to keep in mind:

1. Information can (and likely will) change

2. Expect delays, and plan accordingly

3. Don't lose sight of the wider picture

4. Book ahead to avoid disappointment

5. Ensure your documents are in order

File your flight plan between 22 and 6 hours ahead of departure, and ensure you have your pilot's license, company ID (if applicable), applicable aircraft documentation, and access to copies of all reservations/confirmations. Increased security operations may involve ramp checks, security searches, or routing through a gateway airport for TSA screening.

With careful planning and collaboration (and some amount of patience!) from all involved, Super Bowl LIV is shaping up to be a memorable experience. Fly smart, fly safe, and if you have information that could help the community, pass it along!

Canadian Operators need Special Authorization to keep flying in the NAT

David Mumford
5 February, 2020



Transport Canada has said that all old NAT MNPS authorizations are **no longer valid** for flights operating across the North Atlantic as of 31st Jan 2020 in NAT HLA airspace between FL290-410. In its place, a new **special authorization** called NAT HLA MNPS will have to be added to the operator's PORD or AOC in order to fly in this airspace, which includes the NAT Tracks and Blue Spruce Routes. Airspace above FL410 or below FL290 is not affected by this.

Transport Canada did issue a Civil Aviation Safety Alert (CASA) about this back on 10th Jan 2020, but later admitted it was **too vague and difficult to understand** - therefore they will reissue the CASA. But in the meantime, the requirement to get this new special authorization still stands. Here's how it works:

How do you apply for this new SA?

It appears to be fairly simple. The operator emails TC applying for the NAT HLA MNPS special authorization.

TC will reply by email including a compliance guide to verify equipment and training requirements.

If you wish to operate in the Organized Track System, there are 4 Special Authorizations that Canadian operators must hold:

1. NAT HLA MNPS;
2. RVSM;
3. RNP 4 or RNP 10; and
4. PBCS (ADS-C with proof of contract)

What if you don't have PBCS? Where can you operate?

If you hold the first 3 SAs listed above and the ADS-B SA you may operate on the Blue Spruce Routes only. That's ADS-B for Broadcast.

So to summarize...

Scenario one is that you already possess RVSM, RNP 4 & 10, and PBCS (ADS-C with proof of contract). Your process is to e-mail TC for the application for the NAT HLA MNPS special authorization. A compliance guide will be sent out to verify equipment and training requirements. Once it has been returned and reviewed, a new PORD or AOC will be issued which will contain the new NAT HLA MNPS special authorization.

Scenario two is you do not possess PBCS with ADS-C, but you are either ADS-B capable or already hold a special authorization for ADS-B. In this case the process will be to apply for the NAT HLA MNPS via email and a similar compliance guide will be sent out to verify equipment and training requirements. The difference is that your special authorization will be restricted to the Blue Spruce Routes only. You can request the ADS-B special authorization in the email if you don't have it already. Simply note that in your e-mail request.

Further reading

CBAA new forum information, with login credentials: <https://www.cbba-aaaa.ca>

CASA links can be found here: <https://www.tc.gc.ca/en/services/aviation/reference-centre/safety-alerts.html>

Original CASA 2019-10 Issue 01 that will be replaced:
<https://www.tc.gc.ca/en/services/aviation/documents/CASA-2019-10.pdf>

Thanks to the Canadian Business Aviation Association who helped provide the information in this post.

Additional ATS Surveillance Charges in

Shanwick

Chris Shieff


5 February, 2020



As ATS services are now mandated through most of the North Atlantic Oceanic airspace, NATS has introduced **increased and additional charges for ATS surveillance**. These charges are to recover the costs of ADS-B usage in the Shanwick Oceanic ATC coverage area.

There are **2 different** charging zones:

1. **North Atlantic Crossing Zone:** comprises the Shanwick FIR/OCA. Any traffic that touches its boundaries or operates to/from or through it are to be charged a NAC zone fee **UNLESS** it is operating solely within separate airspace jurisdictions (i.e. BOTA, NOTA, SOTA, etc.) or operating within the newly designated “Tango Zone” area, which is the second charging zone.
2. **Tango Zone:** a smaller, defined area of airspace within the Southeast corner of the oceanic airspace surrounding ATS routes T9 and T290 (does not include the more westerly Tango Routes T16, T13, and T213 – these fall within the North Atlantic Crossing Zone!)

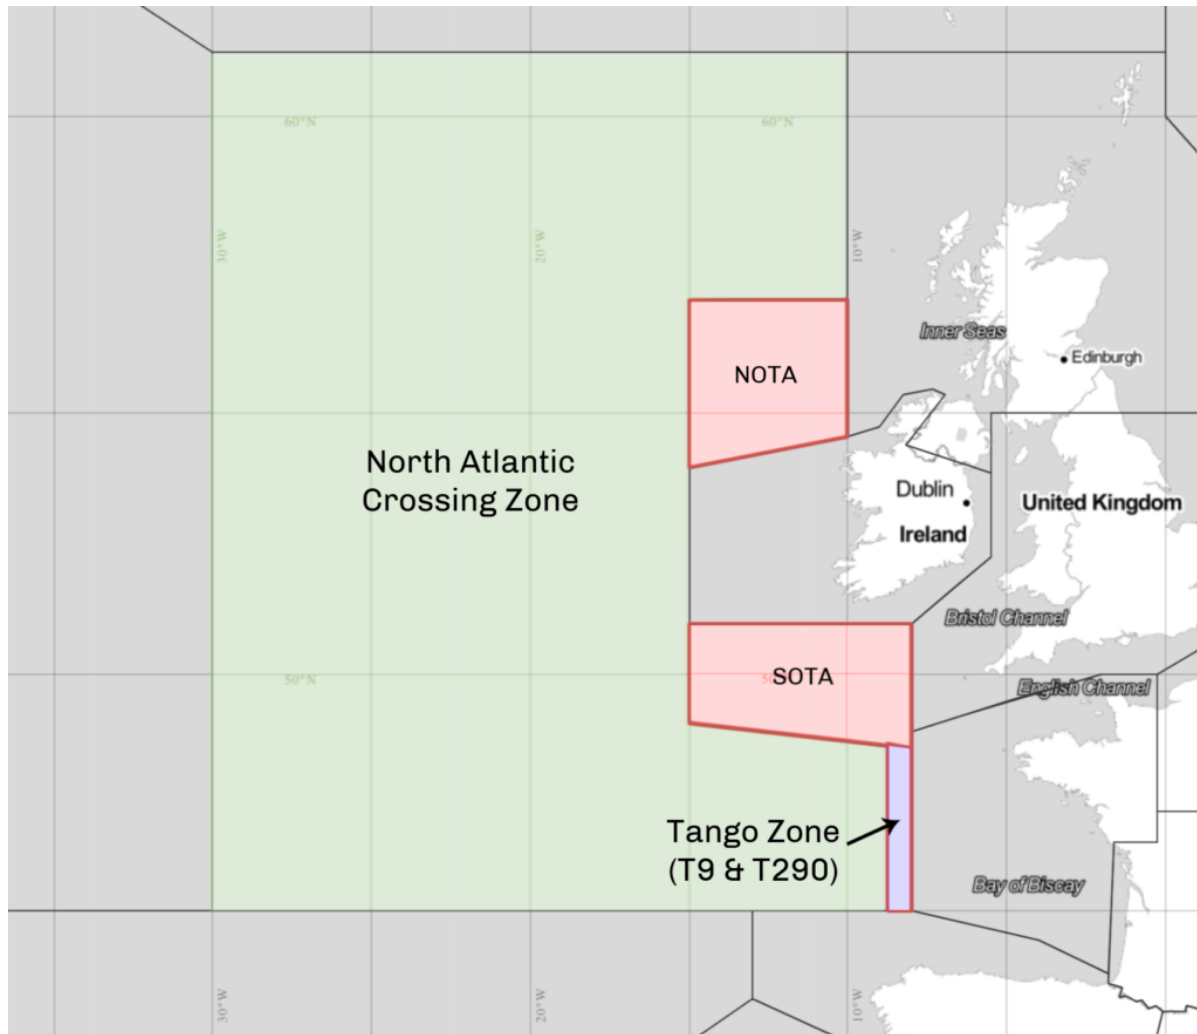

There are **2 different** charges:

1. **“Core”** charge: one standard charge that remains the same in each zone.
2. **“Data”** charge: covers ATS surveillance data usage and changes within each zone reflecting the differing costs of satellite data.

Per flight	North Atlantic Crossing	Tango
Core	£56.04	£56.04
Data	£31.64	£4.90
Total	£87.68	£60.94

If operating through **BOTH** the Tango and NAC areas, flights will only be charged the NAC area fee.

Charges will **NOT** vary by time, weight or distance flown.

You can check out the full briefing to airlines issued by NATS [here](#).

Read about the changes coming up for the Tango Routes on Jan 30, 2020 – the same date that the expanded NAT Datalink Mandate goes into effect.

Risk assessing Iran ops - the UIA 737 may have been shot down

Mark Zee
5 February, 2020



Special Update Thursday 09JAN: Members, please see either your email or this post in the Members forum, for a special briefing and update.

08JAN: Iran/Iraq Information page activated with latest information.

The cause of the crash of Ukraine International Airlines (UIA) AUI/PS752 on departure from Tehran is not yet determined, and given political circumstances, may not be clarified beyond reasonable doubt anytime soon.

Purely from the perspective of making a risk assessment for operations to Tehran, and Iran in general, however, **we would recommend the starting assumption to be that this was a shootdown event**, similar to MH17 – until there is clear evidence to the contrary.

Images seen by OPSGROUP, shown below, show obvious projectile holes in the fuselage and a wing section. Whether that projectile was an engine part, or a missile fragment is still conjecture, but in making a decision as to whether to operate to Iran, erring on the side of caution would dictate that you do not, until there is clear information as to the cause.

Obviously, there is also the wider regional risk as indicated through the US FAA Notams issued late Tuesday night. US operators are covered by these clear and specific Notams – do not operate to Iran, or Iraq, or operate in the Persian/Oman Gulf area.

Other operators are free to make their own judgement, but should note that a majority of non-US international carriers have elected to avoid both countries for the time being.

See also:

- OPSGROUP Article: FAA Bans Flights Over Iraq And Iran Following Missile Strike On US Base
- OPSGROUP Article: Germany publishes new concerns for Iraq overflights

Images from ISNA, Reuters; marking of projectile areas from JACDEC.





ISNA PHOTO

Abolfazle Mahrokh



 **REUTERS**

Germany publishes new concerns for Iraq overflights

Mark Zee

5 February, 2020



Late Monday evening, the German LBA published a **new warning for Iraq**, indicating areas of concern for overflying traffic, together with a new warning on ORBI/Baghdad Airport.

Notam B0007 of 2020 (issued Jan 6) replaces Notam 0002 (issued on Jan 2nd), and these are the routes that Germany now considers a potential risk for aircraft below FL260:

Airway UM860 NAMDI - NINVA

Airway UM688 RATVO - SOBIL


Airway L718 TAGRU - KABAN

Airway L417 MUTAG - VUSEB

Airway M434 UMESA - BOXIX

Airway R652 MUTAG - DAVAS

Seen on the map below, all these airways are in the north east of Iraq: the yellow lines are the warnings that existed on and prior to Jan 2nd, and the orange lines show the additional areas flagged in Mondays Notam.

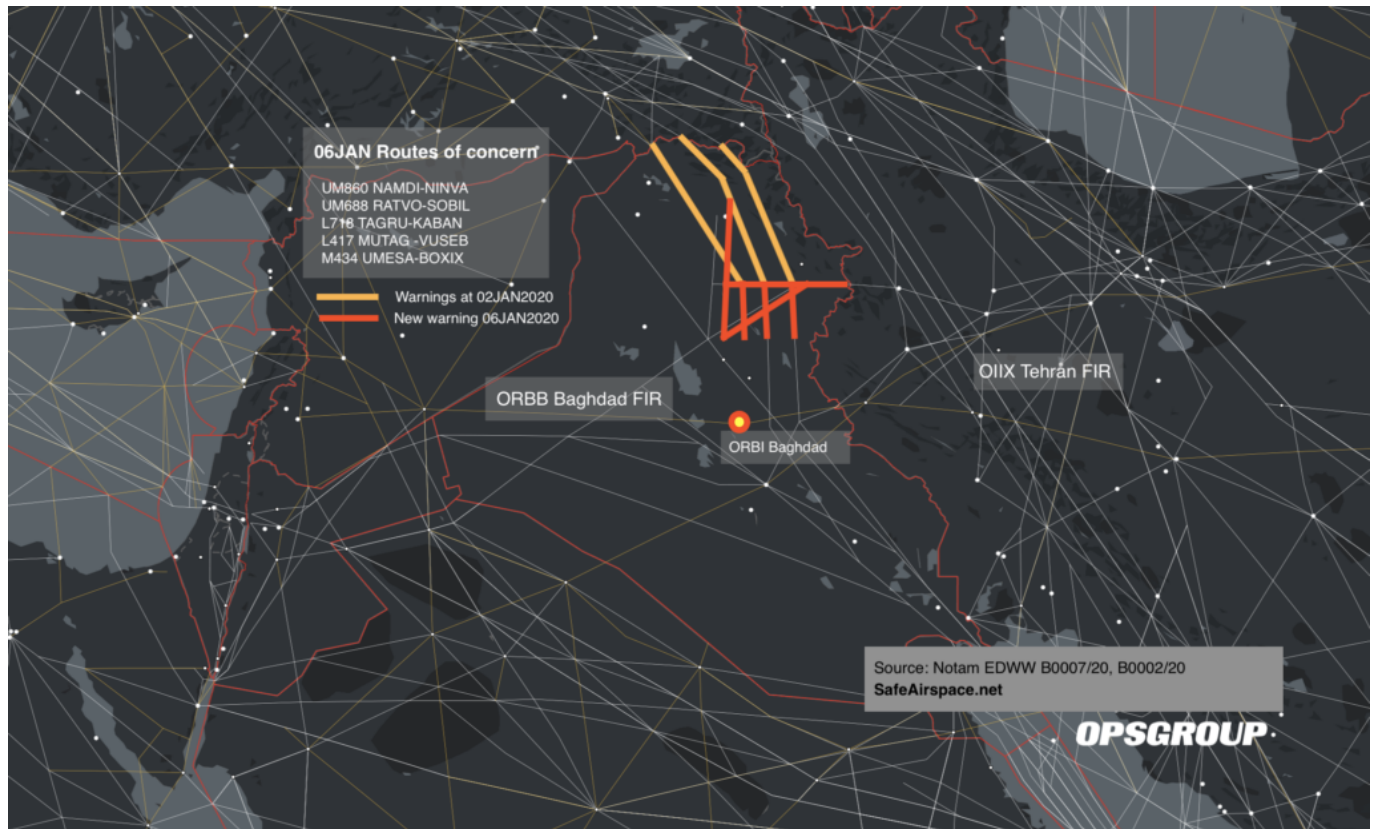

Of the other primary states that issue airspace warnings – the UK, France, and the US – none have issued updated guidance yet this year.

There is no doubt that the events of Jan 3, 2019 at ORBI/Baghdad Airport have created an extremely tense situation between the US and Iran. The aviation security picture in the Middle East, already fragile and unstable, is now unpredictable. A response by Iran to the US airstrike of Jan 3rd seems possible.

Specific to the Baghdad Airport incident, it seems early reports of Katyusha rockets can be discounted, that it was an attack carried out on vehicles near the airport by US Apache Helicopters. Civil traffic resumed operations shortly after the attack with several departures operating ‘as normal’. Overflights continued during the attack.

As to the Iranian response, anything that looks like a US asset or ally could be a target – military or civil. US operators, at a minimum, should be avoiding the Tehran FIR, and considering security carefully when operating in other countries in the region, most notably Israel, Lebanon, and Kuwait – as a response may target airports in those countries or foreign aircraft. That said, it’s a guessing game right now, and predicting the specifics of a response is extremely difficult.

For full analysis, and a listing of all current warnings, see **Safe Airspace**.

ADS-B Mandates Around The World!

David Mumford
5 February, 2020



ADS-B has come to the US and many parts of the world. **What do you need to know?**


Firstly, what is ADS-B? Automatic Dependent Surveillance-Broadcast uses the aircraft's GPS position information and provides it to the mode S transponder allowing ATC to track the aircraft more accurately than radar does.

As of January 1, 2020, all aircraft operating within most US airspace are required to transmit certain information using ADS-B OUT avionics.

Briefly, ADS-B OUT transmits information from the aircraft to ground stations or satellites whereas as ADS-B IN avionics receives information from ground stations or satellite based systems.

The ADS-B required airspace in the US includes everywhere Mode C is required AND:

- Class A, B and C airspace, Class E at or above 10,000' MSL (but not below 2,500' AGL).
- Within 30nm of Class B (Mode C veil).
- Above the ceiling and within lateral boundaries of Class B and C up to 10,000'.
- Class E over Gulf of Mexico, at and above 3000' MSL within 12 nm of US coast. The non-contiguous US is also included: Hawaii, Guam, Puerto Rico and Alaska.

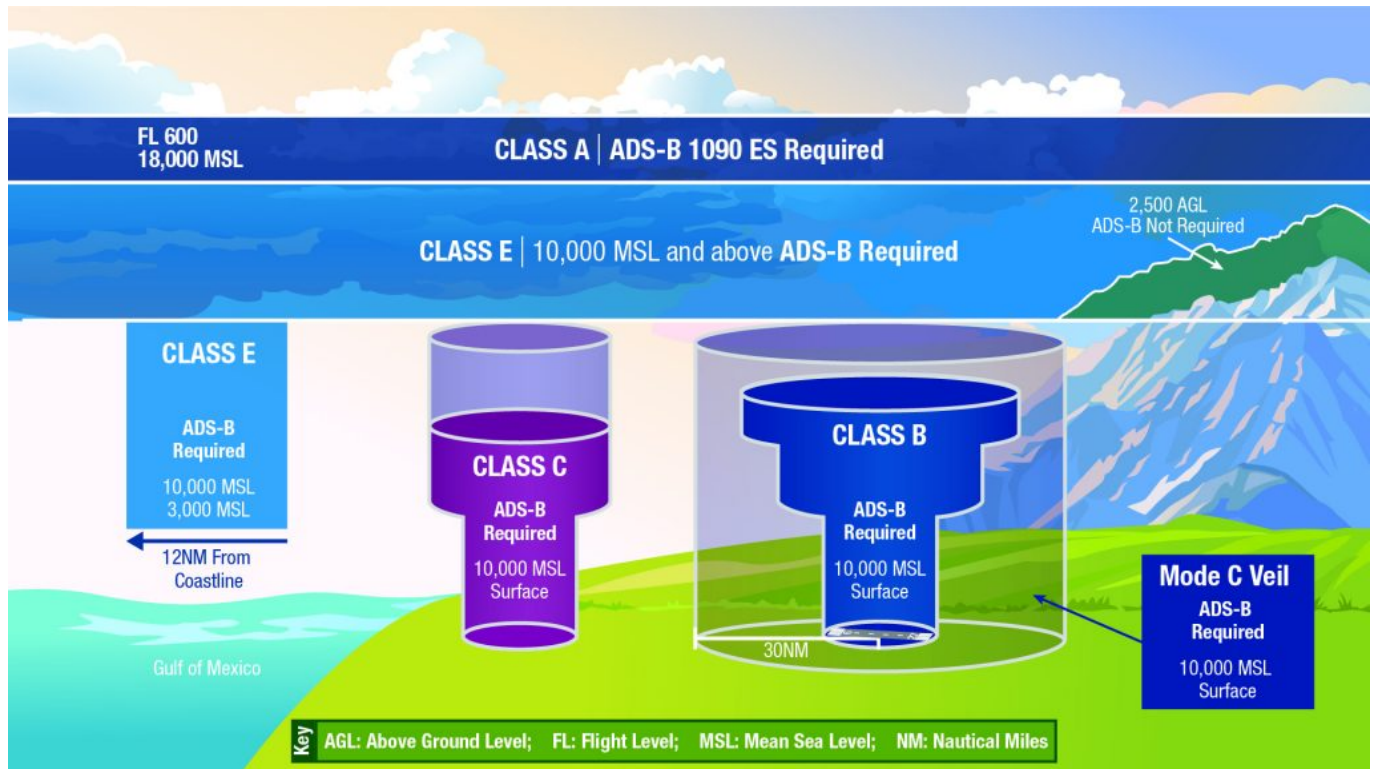

Also, according to the US AIM, operators flying at 18,000 feet and above will require equipment which uses 1090 ES (extended squitter). Those that do not fly above 18,000 may use either UAT (Universal Access Transceiver) or 1090ES equipment. For international operations 1090ES is by far the most accepted system.

Here's the operational stuff...

For the most part you may notice **very little change from radar controlled airspace** and there may be no ADS-B specific controls in your cockpit.

During flight you may encounter **ADS-B specific phraseology**. Instead of the word 'radar' you may hear 'surveillance' as in 'Surveillance service is terminated'. Another example would be 'Pressure altitude is invalid' instead of the previous 'Mode Charlie is invalid'.

Failures may be dealt with differently depending upon avionics installations so check your manuals for any specific procedures. One example is if your left side GPS fails and you are using your number 1 transponder then ADS-B may lose data input therefore select transponder number 2 to continue ADS-B data transmission. There may be no indication of the ADS-B failure in the cockpit.

In the US, the operator is required to fly a route that has ADS-B service availability so the FAA has provided an ADS-B Service Availability Prediction Tool (SAPT) which should be used not more than 24 hours prior to the planned departure to ensure the planned route has ADS-B coverage. **If there is an ADS-B outage along your planned route you must plan another route.** Make sure your flight planning provider is doing this!

Flight planning codes are important as this is the only way that ATC knows you are properly equipped and authorized. The FAA's InFO 15015 has good information on filing correctly. There are numerous codes for ADS-B equipment based on your specific installation of 1090MHz ES, UAT and/or VDL mode 4.

The FAA encourages the **reporting of ADS-B surveillance malfunctions** (AIM 4-5-7 f.). You can do this by phone or radio to the nearest Flight Service Station.

What if I don't have ADS-B installed right now?

If you still don't have ADS-B, **your options aren't great**. The FAA spells it out in the Federal Register, but simply put, **you must receive authorization from ATC to fly before every flight** that is planned in ADS-B required airspace.

To do that, you have to use the new ADS-B Deviation Authorization Preflight Tool (ADAPT) that the FAA has developed – which allows you to request authorisation to fly from ATC. Do this online, at least one hour but not more than 24 hours before your flight. AOPA give this advice: *“Don't call the ATC facility to ask, and don't request access from a controller over the radio – the answer will be no. Only if your ADS-B Out hardware fails in flight will controllers be able to issue an airspace authorization to an airborne aircraft.”*

The word from the NBAA is that there is **no planned relaxation of the ADS-B rules**, so operators who have not equipped will be at the mercy of ATC for every single flight planned through ADS-B airspace. ATC might not be able to grant authorizations for a variety of reasons, including workload, runway configurations, air traffic flows, and weather conditions.

What are the ADS-B rules in the rest of the world?

ADS-B usage is expanding in many countries at different rates. We have compiled a list below of countries and requirements.

Mandates now in effect...

Australia: Requires ADS-B for operations at or above Flight Level 290. Foreign aircraft can operate without ADS-B below FL290 until June 2020. Check AC 21-45 for more info.

Hong Kong: The AIP GEN 1.5.3 states: All aircraft flying within Hong Kong FIR at or above F290 shall be installed with ADS-B. This requirement has been in place since December 2014!

Taiwan: In Jan 2020, ADS-B became mandatory for all aircraft operating within the Taipei FIR, at or above FL 290. Check our article for more info.

Vietnam: Since July 2018, Vietnam has required aircraft over MTOW 15,000kg to have ADS-B. But from 1st Jan 2020, this limit was brought down to apply to all aircraft over 5,700kg. Aircraft without ADS-B can still operate through Vietnam's airspace, but are restricted to the lower levels. AIC 08/16 has all the details.

India: The ADS-B mandate across Indian airspace outlined in AIP SUP 148/2018 was due to take effect on 1st Jan 2019, has got delayed to 1st Jan 2020 (as advised by Notam). This AIP supplement states that all aircraft flying on PBN Routes pretty much everywhere in Indian continental airspace at or above FL290 must carry serviceable 1090 MHz ES ADS-B transmitting equipment that has been certified as meeting the requirements.

United Arab Emirates: AIC 13/2019 published in Nov 2019 says *“Operators are made aware that ADS-B OUT will be mandated from 01 January 2020 within UAE airspace.”* That means you need ADS-B everywhere, at all flight levels!

Malaysia: As per AIC 03/2017, from 31 December 2019 you need ADS-B to be able to operate on airways N571, P628, L510, P627, L645 and P574 between FL 290 to FL 410.

Singapore: Since May 2018, ADS-B has been required for ops at or above FL290 on airways L642, L644, M753, M771, M904, N891, N892, Q801, Q802, Q803 and T611. Check the AIP ENR 1.8 Section 7 for details.

Indonesia: Since the start of Jan 2018, all aircraft flying in Indonesian airspace at or above FL290 needed

to be equipped with ADS-B. Check our article for more info.

French Polynesia/Tahiti: The AIC PAC-P A 06/19 says that from 1 January 2019, aircraft flying above flight level 195 need ADS-B. Then from 1 January 2022, this will be required for all flight levels!

Upcoming mandates...

Europe: ADS-B will be required after 7 June 2020 for aircraft over 5700kg and flying faster than 250 knots and on an IFR flight plan. There will be some exemptions for older aircraft in Europe. Check this EASA doc for more info.

Seychelles: From 7 June 2020, you'll need ADS-B to fly through the FSSS/Seychelles FIR. AIC 1/2019 applies.

New Zealand: The CAA proposed rule change would make ADS-B mandatory for all aircraft in controlled airspace below Flight Level 245 from 31 Dec 2021.

Saudi Arabia: ADS-B will be required in Class A and B airspace starting 1 Jan 2021. The way they've published this is confusing: the requirements are laid out in this GACAR Part 91 document, backed up by this Notam issued for the OEJD/Jeddah FIR:

A1871/19 - ADS-B OUT REQUIREMENT ENFORCEMENT DATE IN CLASS A AND B AIRSPACE AS PER GACAR PART 91.303 IN KINGDOM OF SAUDI ARABIA HAD BEEN CHANGED TO 1 JANUARY 2021 INSTEAD OF 1 JANUARY 2020. 31 DEC 19:15 2019 UNTIL PERM. CREATED: 31 DEC 19:30 2019

Mongolia: This one straight from the AIP SUP: From 17 June 2021 at 0000 UTC, all aircraft flying within the airspace of Mongolia above flight level 6150m must carry serviceable ADS-B transmitting equipment (Mode S Transponder and GNSS source position)... Whilst aircraft flying below flight level 6150m, the carriage of ADS-B equipment remain optional.

Mexico: A Circular issued by the Mexican CAA in Dec 2019 advises that the ADS-B requirement over airspace of Mexico has been delayed until 1 Jan 2022.

South Africa: The plan was to mandate ADS-B at or above FL290 from April 2020, but they have recently issued a draft AIC that says this will be delayed to 15 June 2023.


Canada: In Nov 2019, Nav Canada announced it was delaying its 2021 ADS-B mandate. No new date has been set yet. So although ADS-B will be used for surveillance in Class A airspace (i.e. above FL180) from 25 Feb 2021 onwards, it won't be mandatory for aircraft to be equipped.

Sri Lanka: Not mandated yet, but something's in the pipeline. The CAA states on their website: *"This is to inform all aircraft operators operating in Sri Lanka airspace (Colombo FIR) that ADS-B trial operations have been commenced and in the near future it will be fully operational covering the entire Sri Lanka sovereign airspace and extending the surveillance coverage of Colombo FIR further."*

Any countries we missed? Let us know!

Nationwide French ATC strike on Jan 9

Declan Selleck
5 February, 2020

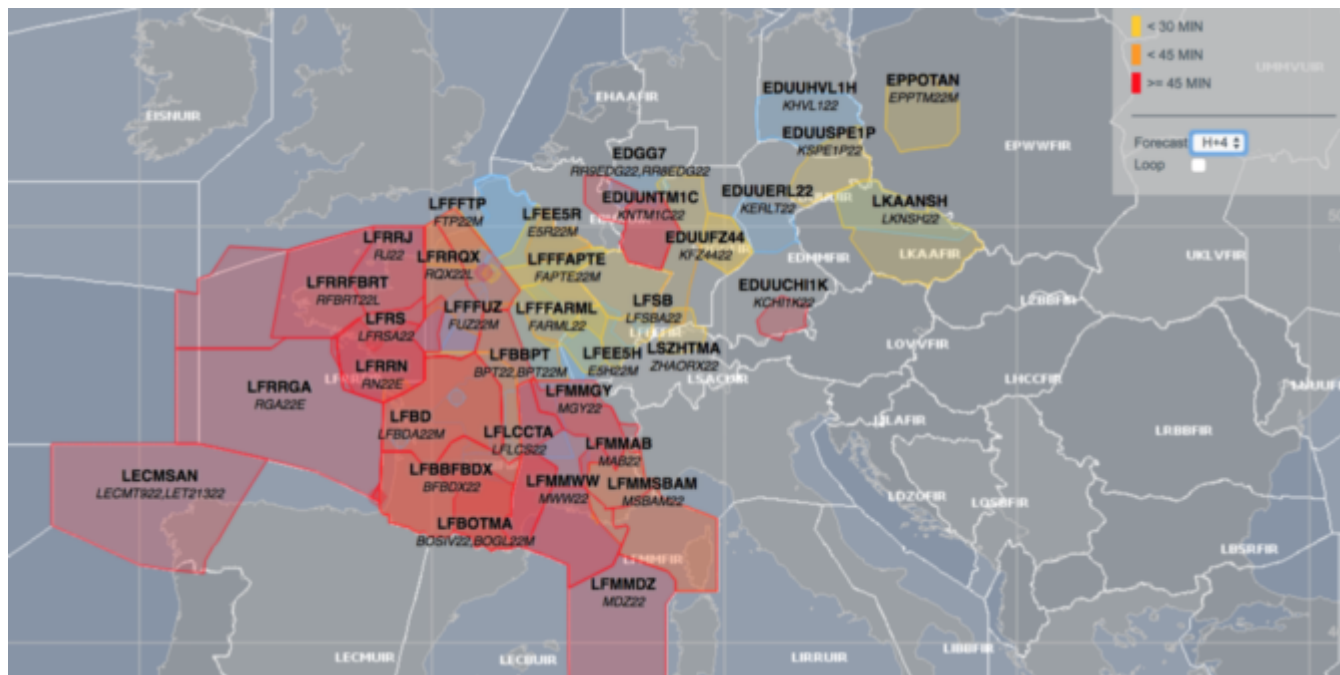

This week's nationwide French ATC strike looks to be going ahead as planned. It will run from 1800z on Weds Jan 8, until 0530z on Friday Jan 10; but the worst of the delays will happen during the day on Thurs Jan 9.

At LFBG/Toulouse, airlines have been requested to reduce their scheduled flights by a third from 0500-2300z on Thurs Jan 9; but that's the only airport which has issued this kind of restriction so far.

Eurocontrol's Mitigation Plan can be found here.

We expect this strike will be much the same as the five French ATC strikes we had in December – big delays at the major airports and for overflights, busy Tango Routes with traffic avoiding French airspace in the west, and Algeria/Tunisia will most likely let you fly through their airspace without special permission if you want to avoid French airspace in the south.

For the latter, just make sure to add the right AFTN codes on flight plans! That means – as well as filing your FPL to the normal Eurocontrol addresses, you must also include those for Algeria (DAAAZQZX and DTTCZQZX) and Tunisia (DTTCZQZX and DTTCZRZX) – and make sure these are included for any subsequent DLA messages as well.

For real-time updates of any airspace issues once the strike has started, keep an eye on this handy French ATC webpage: <http://dsnado.canalblog.com/>

And check out our article for everything else you need to know about how to survive French ATC strikes!


New route requirements for Iceland

David Mumford
5 February, 2020



There are some new route requirements for flights to BIKF/Keflavik and BIRK/Reykjavik.

These can be found in the updated version of **AIP ENR 1.8.4.1.3.7** which explains exactly how you should file your flight plans to/from both BIKF and BIRK. But to make all this blurb easier to understand, the good folks at Isavia have published some handy graphic presentations of the requirements:

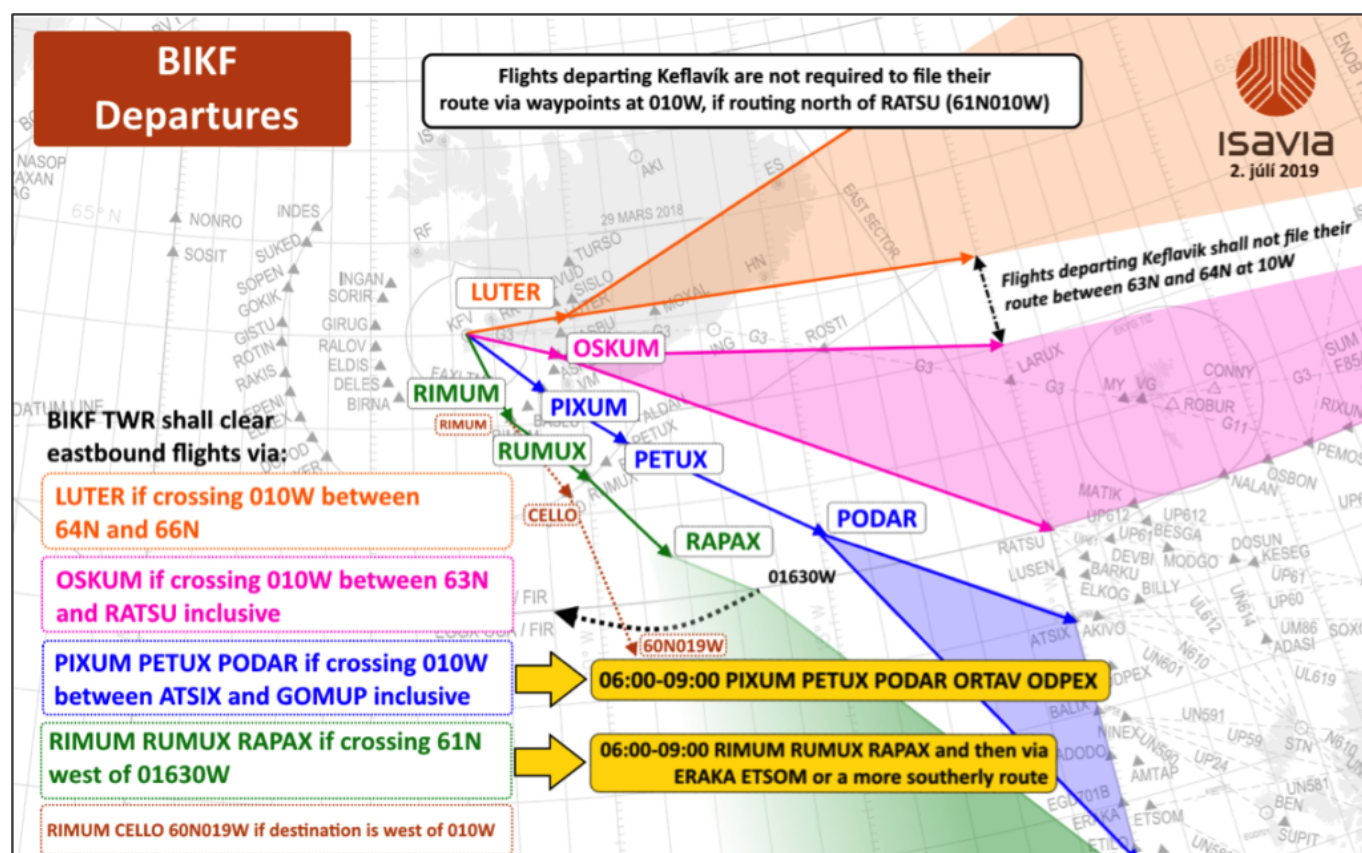

BIRK Departures

Flights departing from Reykjavik are not required to file their route via waypoints at 010W, if routing north of RATSU (61N010W)

ISAVIA
3. janúar 2019

BIRK TWR shall clear eastbound flight via:

LUTER MOXAL if crossing 010W
between 64N and RATSU inclusive

PIXUM PETUX PODAR if crossing 010W
between ATSIX and GOMUP inclusive

RIMUM RUMUX RAPAX if crossing 61N
west of 01630W

BIKF/BIRK Arrivals


Flights inbound to Keflavik or Reykjavik are not required to file their route via waypoints at 010W, if routing north of RATSU (61N010W).

ISAVIA
3. janúar 2019

Reykjavik OACC shall clear westbound flights inbound to BIKF/BIRK via:

ING NASBU or ALDAN ASRUN if crossing
010W between 64N and ATSIX inclusive

BREKI BASLU if entering BIRD between
61N01236W and 61N019W

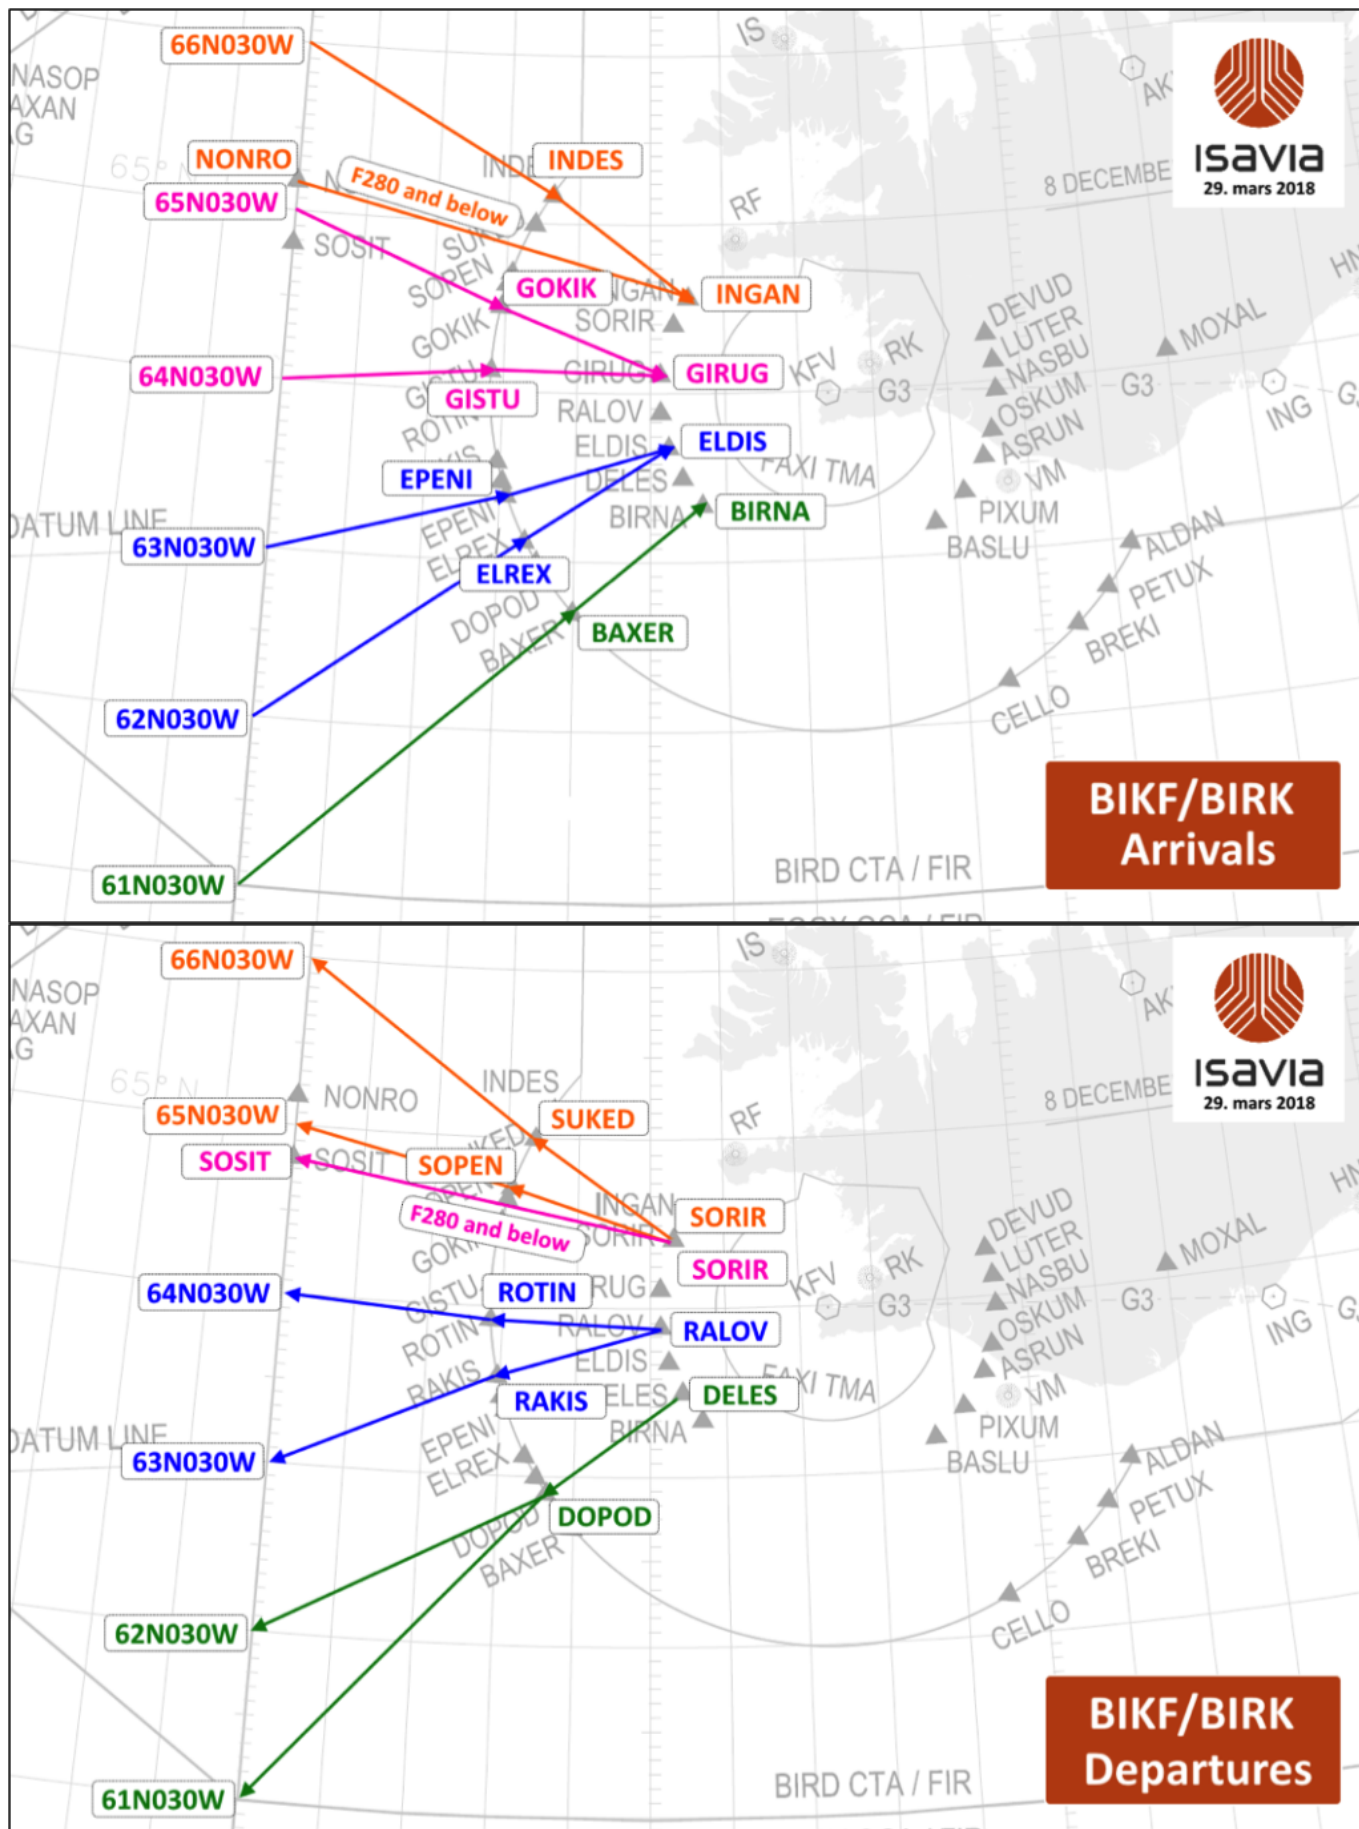

If you follow the guidance and flight plan accordingly, you should avoid any nasty last-minute “FPL REJ” messages!

Further reading:

- You can check the full Iceland AIP online [here](#).
 - For a summary of all the NAT changes, including EGGX/Shanwick, CZQX/Gander, BIRD/Iceland, ENOB/Bodo, LPPO/Santa Maria, and KZWY/New York Oceanic East, click [here](#).
-

A review of aviation in Hurricane Dorian relief efforts

Mark Zee

5 February, 2020



The response to Hurricane Dorian was overwhelming – likely the single greatest aviation response to a natural disaster in history. Without these flights, supplies and relief would not have reached so many, so quickly.

And yet, there are **many lessons to learn**. We saw a lot of things that went right, and a lot of things that went wrong. And we'd like to ensure that we have a full picture of events so that we can learn those lessons. We'll share the review with you, just tick the box on the survey.

Hence, this little survey. It's anonymous. Just say what you saw. About 10 questions – 5 minutes of your time. To jog your memory of what happened, have a look at our Operational Summary from those first days of the relief efforts.

We would especially like input from:

- NGO's and relief organizations involved in Dorian (whether aviation focused or not)
- Pilots that flew during Dorian
- Flight ops people – ATC, Dispatch, Coordinator, Scheduler

- Aircraft operators (Civil/Mil/Govt)
- Anyone that was part of the aviation response

Thank you for your help! With a better process, we can save lives and get relief flowing more quickly in future disasters.

Answer the survey below, or open in a new window. When you're done, please share the link to this page!

New rules for charter flights to Malaysia

David Mumford
5 February, 2020



Foreign operators doing charter flights to Malaysia now need to obtain a “Foreign Air Operator Certificate” (FAOC) to be able to get a landing permit, and this needs to be requested 90 days in advance!

This new requirement was introduced earlier this year with AIC 3/2019, but authorities have only recently started implementing it.

Private flights are not affected. The process for these remains the same as before – apply a week in advance, either direct to the authorities at airtransport@dca.gov.my, or through a third party agent (recommended!). Local agents have said that Air Ambulance / Medevac flights do not need to obtain an FAOC either.

But for charter flights, the new requirement looks like a real pain. Here's how it works... (thank you Julie at ASA Group for helping with this info!)

1. Application needs to be sent 90 DAYS prior to the intended first trip into/out of Malaysia. The following documents need to be submitted:

- Completed FAOC Matrix form (see links below).
- Carriers liability insurance.
- If aircraft is leased, approval of civil aviation authorities of the State of the Operator of the lessee, with identification of the operator that exercises operational control on the aircraft.
- Document authorizing the specific traffic rights, issued by appropriate department or resulting from a bilateral air transport agreement (and any other document the CAAM considers necessary to ensure that the intended operations will be conducted safely).
- Letter of appointment on behalf of the operator to say that their chosen handling agent in Malaysia (i.e. ASA Group) can apply on the operator's behalf.

The FAOC will be valid for one year.

2. Once the FAOC is issued, then you have to get your handling agent to apply for each landing/overflight permit for you via the AeroFile system. Here's what they'll need from you to make that happen:

- Airline/Operator Code in IATA (2 characters) & ICAO (3-4 characters) format.
- Home country of registration.
- Copy of FAOC.
- Copy of your own AOC issued in your country of registry.
- Main office address and contact for the operator.
- Copy of insurance coverage.
- Appointment letter from operator stating that the handling agent can apply on their behalf

All subsequent individual applications for landing permit requests after successful application in the AeroFile system will require a copy of the Gendec (and for bigger aircraft with 20 seats or more, you'll also need to provide a copy of the Charter Agreement).

For these landing permit requests through the AeroFile system, your handler will need a minimum of three days notice. They should request slots at the same time as requesting the landing permit.

To clarify - an FAOC is only required for landing permits for charter flights. Overflight permits will need to be applied for via the AeroFile system, but do not need an FAOC.

Handy links:

AeroFile system - <https://www.mavcom.my/en/industry/aerofile-registration/>

FAOC forms -

<http://www.dca.gov.my/sectors-divisions/flight-operations/forms/foreign-air-operator-certificate-faoc/>

AIC 3/2019 - <https://ops.group/dashboard/wp-content/uploads/2019/12/WM-eAIC-2019-03-en-MS.pdf>

5 tips for Safer Winter Ops

Chris Shieff

5 February, 2020



On November 11th this year, a regional jet slid off a snow-covered runway in Chicago.

What made this event unique was that the entire incident was caught on video from a passenger onboard the aircraft. Although no probable cause has been published yet, it does serve as a stark reminder of the challenges of operating in the winter season. While every operator and aircraft will have their own specific procedures, here are 5 golden rules that could help you stay out of trouble during these colder months.

#1 - Anticipation

Winter ops can be expensive, especially because de-ice and anti-ice fluid is a costly commodity. If the weather outlook indicates snow or frost, a good idea is to **book hangar space ahead of time** to keep the aircraft out of the inclement weather. This will be vastly cheaper than a steep de-ice bill. If you didn't manage to spot the weather ahead of time, just pushing the airplane into a hangar before flight can melt a lot of ice and snow adhering to the aircraft.

Story time: Once upon a time in Teterboro Airport (KTEB) a Gulfstream crew was set to begin their trip on a non-passenger reposition flight down to Florida. It was a beautiful, crisp winter evening, with clear skies ahead. Unfortunately, the airplane that they were assigned to had been sitting outside on the ramp for nearly a week and was covered in several inches of ice and snow. There had been several days of continuous of heavy freezing rain and snowfall during the week it was left outside by the previous crew. Initially, the inclination was to de-ice the airplane so they could depart as soon as possible. However, after an inquiry with the FBO, the amount of de-ice fluid required to clear the airplane was estimated at \$40,000. Instead, the crew devised another plan to help save the company's resources. They inquired, and subsequently received, heated hangar space for a mere \$700. After a few hours of defrosting, the airplane was completely clean and dry of contaminants. What's more is that ultimately the FBO waved the \$700 hangar fee, saving the company a whopping \$40,000. A win for everyone all around.

#2 - Limitations you didn't worry about in summer

ENGINE OIL

Oil takes much longer to reach its minimum temperature in the frigid winter months than usual. When it's cold and highly viscous it may not be able to properly circulate throughout the engine, hence why engine

manufactures like to see a minimum temperature on the oil before high thrust settings are used. For this reason, it doesn't hurt to carry extra taxi fuel to bake in extra time to allow the oil to reach its minimum temperature before takeoff.

LANDING GEAR

Landing gear struts may compress and sit lower due to the colder temperatures. When walking out to the aircraft, check the strut height **before** opening the door. In normal conditions there may only be a few inches of clearance between the door and the ground. However, with a very low nose strut, it may result in the aircraft door coming into contact with the ground when it opens. Similarly, as the aircraft gets heavier during the boarding process, the struts will compress and the fuselage may sink closer to the ground. For aircraft that require mobile air stairs, ask the rampers to lower the mobile air stairs an extra inch or so to allow for this compression.

However, these issues can largely be mitigated on post-flight inspections. If the struts look low, call Maintenance to charge it up before your next flight. The process of recharging gear struts can take up to an hour in ideal conditions, so the sooner it is caught, the less disruption it will cause.

WATER LINES

Unless you fly for an airline, it falls upon the flight crew to remember to drain all the water tanks and purge the lines if the aircraft is being left to sit in freezing temperatures. When water freezes, it expands, which can cause the plumbing systems in aircraft to burst. This can result in significant and costly repair jobs. A good rule of thumb is to purge the water system anytime the temperature will be less than 3C at any point during the layover. Ensure all crew are in the loop, including the Flight Attendant, by instigating a cold weather brief before departure, and again when you've copied the destination's ATIS. *"It looks like the temperature is -2 Celsius at our destination, so we will plan on draining the tanks and lines. Can you complete that while I conduct the external walkaround and offload bags?"* Even if the temperature is above 3C when you land, check the outlook overnight.

Don't forget to empty water from the Nespresso/coffee machines and remove carbonated beverages!

#3 - Go or No Go - You decide

Once you've been de-iced, there's that warm fuzzy feeling that you're finally on your way. But you're not quite out of the woods yet—is your de-ice fluid holding up? The clean aircraft concept requires that your aircraft be free of all frozen contaminants before take-off. When there's even a sliver of frost or if precipitation is re-accumulating after anti-icing, you're already in unknown territory, aerodynamically speaking. Your final determination on whether the aircraft is clean will be through a Pre-takeoff check or Pre-takeoff contamination check. Which are you approved for? (AC 120-60B).

PRE-TAKEOFF CHECK

Pre-takeoff check (typically used in Part 121 operations) is to be completed by the pilots within 5 minutes of crossing the hold short line. Pilots will visually check the representative surfaces to ascertain whether the aircraft is still free of contaminants (for the Embraer Legacy/145 these are the windshield wiper arm and blade and the visible portion of the leading edge of the wing). If necessary, hop into the back and check the wings from the cabin windows.

This check is only done from the comfort of the aircraft and **does not allow you to exceed a holdover time!** You're simply checking the integrity of the fluid and looking for contamination before you try and fly that wing. If the aircraft does not appear totally clean then, regardless of whether you're within the holdover time, its back to the de-ice pad.

PRE-TAKEOFF CONTAMINATION CHECK

Predominantly, Part 135 operators who don't employ 121 procedures for ground de-icing will use the pre-takeoff *contamination* check. Here, holdover tables are "advisory only," so in lieu of a hard cut-off time the crew conducts their own assessment of whether the wings and control surfaces are free of frost, ice, or snow. This, too, must be completed within 5 minutes prior to crossing the hold short line, and may be tactile or visual, as long as the crew can ensure the absence of contamination.

As a reminder, if anti-ice fluid fails, you cannot re-apply another coating of Type IV. You must first use de-ice (Type I) to clear off the failed anti-ice fluid from the airplane before re-applying Type IV.

KNOW YOUR LIMITS

For the following conditions, no holdover times exist:

- Heavy snow
- Moderate and heavy freezing rain
- Hail.

In these cases the anti-fluid does not have the capacity to eliminate the precipitation for very long, if at all. Take FZRA, for instance. When rain from a layer of warmer air above falls through a layer of colder air below, it becomes supercooled. Upon impact with cold surfaces the water will freeze, becoming clear ice. In active freezing rain conditions, this ice is notoriously difficult to keep from forming on the skin of the aircraft. Perhaps more insidious is that clear ice is hard to detect visually, especially in the dark, and usually warrants a tactile check.

It goes without saying, but we will say it anyway – if you cannot ascertain that the aircraft is clean, do not takeoff. And if your fluid looks like this, do not takeoff!

If you feel like indulging in some reading, have a look at NASA ASRS Directline issue 5 on de/anti-icing mishaps. Although it's from the 1990's, it helps give crew some awareness of the difficulties that can be faced in winter. Events include, but are not limited to, crew that were inadequately sprayed by the de-ice crew, only half the aircraft being sprayed, encountering fluid failure and engine failure caused by snow ingestion on takeoff.

#4 - Expect to be faster in descent

If you are descending through icing conditions, plan ahead. With anti-ice on, the engines spool up, in order to produce sufficient bleed air for the anti-icing systems. This makes descent and deceleration much harder. If you have altitude or airspeed crossing restrictions it pays to start down a little earlier than usual. Don't be reluctant to tell ATC if you're unable to make a speed and/or altitude restriction.

#5 - Be careful with reverse thrust

A common construction typical of business jets is that they are designed with aft mounted engines and a T-tail design. Because of this design, reverse thrust in **excessive amounts** can deflect air forwards of the engines, disrupting the airflow upstream from the rudder, and thus reducing rudder effectiveness. This is sometimes referred to as "rudder blanking." This is the last thing anyone needs in a crosswind on a contaminated runway where steering effectiveness is already compromised. Several accidents have occurred as a result of pilots using too much reverse thrust on contaminated runways, perhaps the most notable of which was an MD88 in LaGuardia, NY (KLGA).

If the aircraft begins to skid, use caution when using asymmetric thrust reversers to get back on centerline. Although once a common technique taught in corporate flight departments, using asymmetric reverse thrust has not proven to be an effective technique. Research has shown that a good technique when loss of directional control is to bring reverse thrust to idle reverse (or completely out of reverse if necessary) and use rudder to keep the aircraft coordinated. Only once directional control is regained then re-apply symmetric reverse thrust to keep slowing the aircraft down.

In a nutshell, flying in winter requires careful planning, good judgement and good execution. But don't feel daunted! There are plenty of resources online, and remember: always plan ahead, expect things to take longer – much, much longer – than usual and don't blindly trust the anti-ice fluid.

Merry Christmas and safe flying! If there is anything to take away from this article, it is: don't de-ice like this...

Risk Alert for North Korea (12/2019)

Declan Selleck
5 February, 2020




Risk Alert issued for North Korea:

Germany has issued a new Conflict Zone Notam, valid through March 25, warning of the potential risk to overflights through North Korean airspace, due to the potential for launch of test missiles without prior notice. As a result, the Safe Airspace warning level for North Korea is now Level 2. The Notam comes as North Korea said it is planning a "Christmas gift" to the US, and the USAF believes this could be a long-range ballistic missile test. North Korea regularly launches short-range test missiles into the Sea of Japan, but halted its long-range tests after diplomatic talks with the US in early 2018. The US prohibits flights across all North Korean airspace, including the oceanic part of the ZKKP/Pyongyang FIR over the Sea of

For more details: <https://safeairspace.net/north-korea/>

Declan Selleck
5 February, 2020

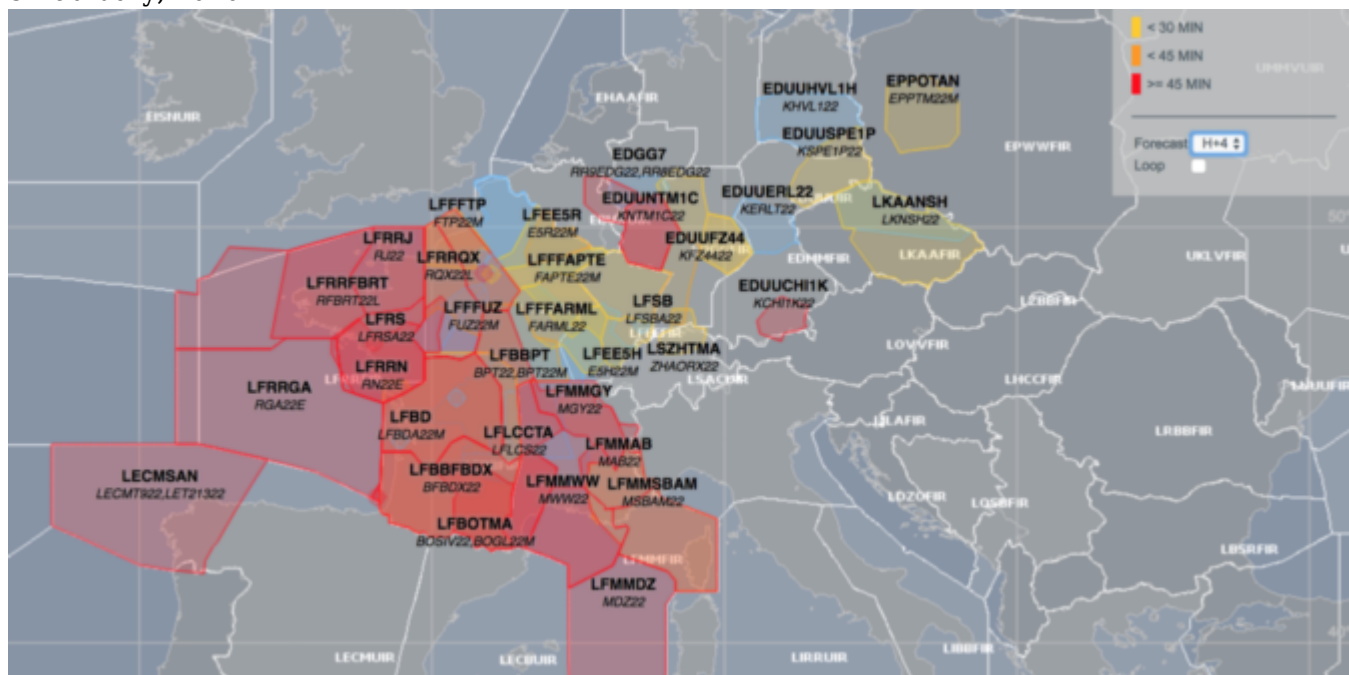

The airlines have **not been requested to reduce their schedules** so far.

For the latter, just make sure to add the right AFTN codes on flight plans! That means – as well as filing your FPL to the normal Eurocontrol addresses, you must also include those for Algeria (DAAAZQZX and DTTCZQZX) and Tunisia (DTTCZQZX and DTTCZRZX) – and make sure these are included for any subsequent DLA messages as well.

For real-time updates of any airspace issues once the strike has started, keep an eye on this handy French ATC webpage: <http://dsnado.canalblog.com/>

And check out our article for everything else you need to know about how to survive French ATC strikes!

ATC in Zimbabwe at breaking point

Declan Selleck
5 February, 2020



The Air Traffic Controllers' Association of Zimbabwe (ATCAZ) has raised concerns with the government over airspace safety.

They say that ageing equipment is mainly to blame, with **loss of air-to-ground radio comms** in the upper airspace now a common problem. There have been **complete radio comms blackouts** on four days this year.

ATCAZ also report that **ATC staff are overworked**; this was made apparent last week at FVRG/Harare airport when controllers who had worked the night shift refused to extend their hours in the morning, citing incapacitation and fatigue, forcing flights delays and cancellations.

It seems this particular incident provoked letters from ATCAZ to the Zimbabwe government to be leaked to local press, which detailed the long-standing concerns that obsolete ATC systems now pose an possible danger to airspace safety.

No word yet from the **Zimbabwe CAA**, except one tweet claiming that there's no problem – "our airspace is open and flights are operating as normal," they say.

Our attention has been drawn to some reports circulating on various media platforms this morning.

Our airspace is open and flights are operating as normal.



9:05 AM · Nov 26, 2019 ·

The Zimbabwe government this week have said they are attempting to **acquire a new radar system**. Transport and Infrastructural Development minister Joel Matiza is quoted as saying – “CAAZ long identified the requirements for replacement of airspace management systems in 2013 which systems comprised air traffic control communications system, navigational aids systems, radar surveillance and aeronautical information management (AIM) systems. The authority is in the process of procuring the airspace management systems. The project implementation will be phased starting with the air traffic control system. The cost of the radar surveillance system is about US\$22 million.”

Last week, IATA issued an updated version of their **Inflight Broadcast Procedure (IFBP)** guidance doc for Africa, having added FLFI/Lusaka to the list of FIR's where this procedure should be applied. There's no mention of Zimbabwe here, but it now appears that operators should prepare for degraded comms for flights through the FVHF/Harare FIR as well. Whatever new ATC systems the government may or may not install here, such things take time in this part of the world, so don't expect any improvement any time soon.

Samoa state of emergency due to measles outbreak

David Mumford
5 February, 2020



Samoa is in the grip of a **serious measles outbreak** right now. Over the past six weeks, the outbreak has infected nearly 4,000 people out of a population of 200,000, killing 60, mostly children under four. **A nationwide state of emergency** has been declared, which will remain in place until Dec 29.

Medical teams from around the world are now working with UNICEF to bring in vaccines to support the Samoan government's vaccination programme.



A Royal New Zealand Air Force Boeing 757 offloads medical stores in Samoa. Photo: NZDF

Tonga and **Fiji** have also reported cases of measles, although the situation seems to be more under control here – largely due to the higher rates of vaccination amongst its populations. In Samoa, the World Health Organisation estimates that only around 30% of the population had been vaccinated prior to the recent outbreak.

The Samoan government effectively shut down the island on Dec 5 and 6, whilst they carried out a door-to-door **mass vaccination campaign** across the country.



Government of Samoa @samoagovt · 19h

In response to the current measles outbreak, the @samoagovt will be undertaking a 'Door to door Mass Vaccination Campaign' on Thursday 5th and Friday 6th December, 2019 from 7am to 5pm throughout the whole country.

Read full notice at facebook.com/samoagovt/



1


23

36



As of Dec 16, the government says that 93% of population had been vaccinated, and announced that the state of emergency would be extended to Dec 29 to allow the authorities to reach the remainder of the population that is yet to be vaccinated.

So far, flights have been operating as usual, and no restrictions have been announced at the country's international airport, NSFA/Faleolo.

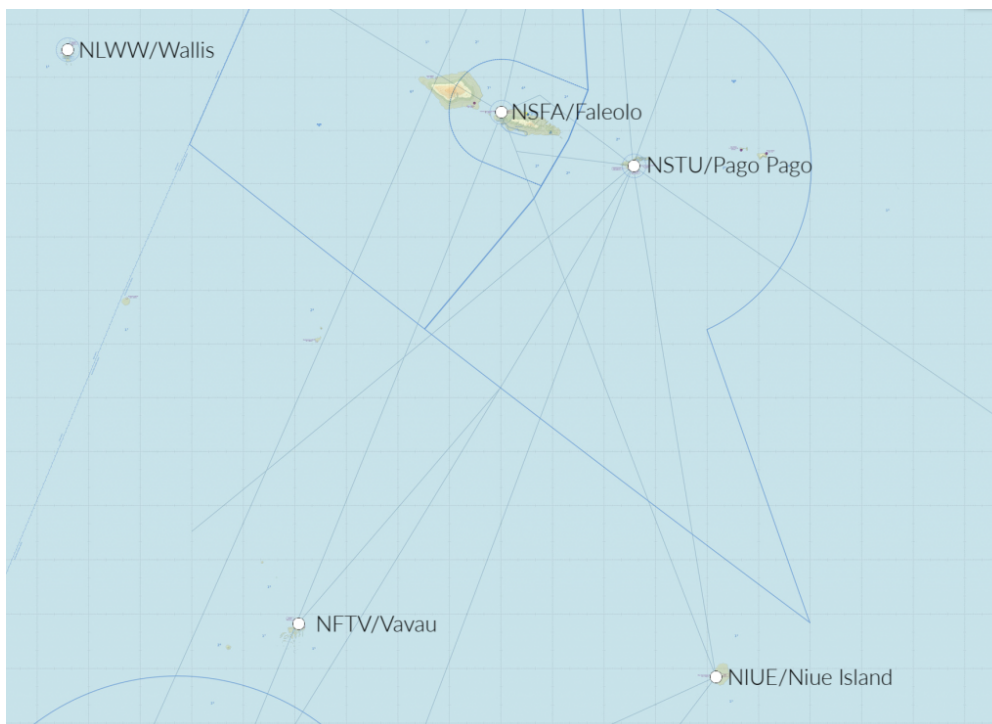

Neighbouring **American Samoa** has reported two cases of measles in the past few weeks. Concerned about the spread of the virus, authorities at NSTU/Pago Pago airport on American Samoa have been denying landing to anyone flying in from **Samoa** (i.e. NSFA/Faleolo) or **Tonga** (i.e. NTF/Fua'amotu) if they don't have a measles vaccination certificate. We've had reports in AiportSpy that the same has been

happening at **PLCH/Christmas Island** as well. In addition, authorities in the **Marshall Islands** and the **Solomon Islands** have announced that travellers will need proof of measles vaccination to be able to enter the country.

For operations to all airports in the region, **ensure your vaccinations are all up to date**, and that you **carry certificates on board** with you to present to the local authorities.

IFBP - Belt and Braces in Africa

Mark Zee

5 February, 2020



ATC in Africa is slowly improving – investment in radar and CPDLC is helping – but vast swathes of airspace remain where ATC, quite simply, is not to be trusted to the same degree as in other parts of the world. Not all of this is the fault of the controller – more so equipment – but crews should be fully aware of the need to be more situationally aware.

The airspace map below shows the current airspace that IATA deems “At Risk”, and recommends applying the **Inflight Broadcast Procedure (IFBP)**.



Specifically, these FIR's:

- **Asmara**
- **Brazzaville**
- **Kano**
- **Khartoum**
- **Kinshasa**
- **Luanda**
- **Lusaka**
- **Mogadishu**
- **Niamey**
- **N'Djamena**
- **Tripoli**
- **Dakar** (*Dakar Terrestrial and Dakar Oceanic FIR's apply IFBP only in the case of the activation of their contingency plans*)

IATA adds a note that Brazzaville, Niamey and N'djamena FIR's provide CPDLC service, however these FIR's are maintained in IFBP area of applicability "to accommodate users' requirement for linear boundaries to the extent feasible". If you were to read between the lines, you might conclude that CPDLC doesn't remove the risk entirely.

This is the **latest version** of the procedure.

Cockpit napping - what are the rules?

Mark Zee

5 February, 2020



As is too often forgotten by regulators, aircraft flown by humans require rules that match human needs.

One of those needs is **sleep**. Normally, we do this for about 33% of the day. If you manage to get a perfect night's sleep, have a short ride to the airport, and then operate a long haul flight that departs on schedule, you *might* get away with not feeling tired during it. Most of the time, these perfect conditions don't show up on the day.

Especially with the cumulative fatigue we suffer as pilots, a quick nap works wonders.

NASA did extensive research on this in 1994, and the findings showed that "The benefits of the nap were observed through the critical descent and landing phases of flight ... The nap did not affect layover sleep or the cumulative sleep debt displayed by the majority of crew members. The nap procedures were implemented with minimal disruption to usual flight operations and there were no reported or identified concerns regarding safety." This gave us the term, "**the NASA Nap**".

So, napping is good. NASA says so. But, around the world, we have very different regulatory approaches to this. To make it sound better, the regulators call it "Controlled Rest", or CR.

Places where you can:

Australia, Bolivia, Canada, China, Europe, Israel, India, New Zealand, Turkey, and the United Arab Emirates.

[source: *Flight Safety*, 2018]. Know more? Comment on the article and we'll update.

Places where you definitely can't:

The US. Although the Air Force and the Coast Guard allow it, the FAA does not – neither for Part 91, nor Part 121. CR was considered when the latest FAA rules were developed beginning in 2010, but it was excluded from the final regulations. FAA Advisory Circular 120-100 (FAA, 2010, page 11) states: Although a number of foreign air carriers authorized in-seat cockpit naps during flight, **the FAA does not authorize such in-seat cockpit naps.**

Just drink coffee!

That seems to be the FAA position. No napping allowed. There are some wonderful resource guides, listed below, that delve deep into the subject, but in terms of napping – it's still forbidden. Why? That's a good question. We don't know.

Beverage	Caffeine Amount
Espresso coffee	78-106 mg/100ml
Brewed coffee	36-112 mg/100ml
Instant coffee	23-73 mg/100ml
Decaffeinated coffee	0-5mg/100ml
Black tea	13-47 mg/100ml
Energy drinks (e.g. V, Red Bull, Monster)	15-42 mg/100ml
Soft drinks (e.g. Coca-Cola, Pepsi, Lift, Mountain Dew)	9-14 mg/100ml
Dark chocolate	43-125mg/100g
White and milk chocolate	21-23 mg/100g

Guidance Docs:

- Fatigue Management for Airline operations (ICAO/IATA/IFALPA)
- Fatigue Management for GA operations (ICAO/IBAC/Flight Safety)
- Controlled Rest Resource Guide (Flight Safety)
- NASA Research Document (1994): Effects of Planned Cockpit Rest on Crew Performance and Alertness in Long-Haul Operations

Discussion



We will discuss the topic in the Ops Chat on December 12th, 2019 at 12pm EST – register here:
<https://ops.group/opschat>

No Room for Error - GNE's and the North Atlantic


Chris Shieff
5 February, 2020

Firstly, **avoid using ARINC 424** shorthand for programming oceanic points. This has been a factor in many GNE's, given how easy it is to misplace the letter as a prefix or suffix. For instance, consider how simply misplacing the "N" could cause a drastic lateral deviation:

- 50**N**60 = 50N 160W
- 5060**N** = 50N 060W

If you have the capability on your aircraft, use the full coordinates, including minutes.

For the last few years, use of half degrees of separation has been on the rise in an attempt to enhance airspace efficiency. But on flight displays units that only show 7 digits, these half degree coordinates are misleadingly displayed as full coordinates. For instance, the half coordinate N55°30' W020° will display as N55°W020° (see image below, which shows identical waypoint labels for points separated by half a degree!). In this case, it is imperative to view the expanded version of coordinates (degrees *and* minutes).

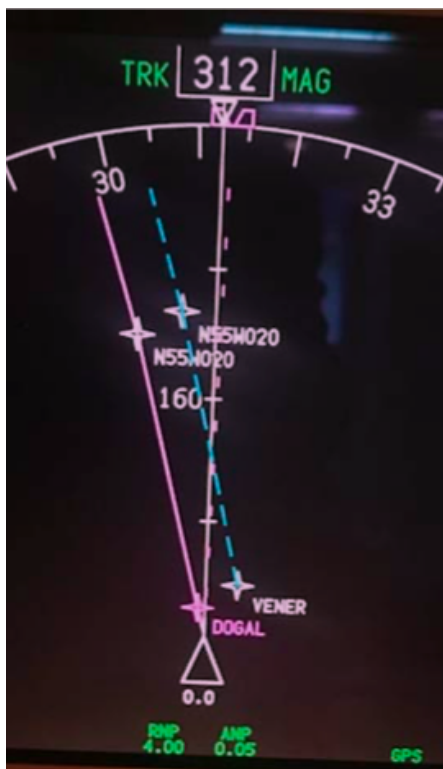

Another frequent error leading to GNE's is *transposing* numbers during data entry. This commonly occurs when you complete almost the entire crossing along one degree of latitude, then fly the last waypoint at a different latitude. For example, with a cleared route of 57°N 050°W, 57°N 040°W, 57°N 030°W, **56°N 020°W**, one can accidentally enter **57°N 020°W**. This will put you 60nm off course.

But there is good news! These errors are easy to recognize and avoid by having a specific method of waypoint verification.

2) Waypoint Verification

Whether entered via ACARS or manually, both crew members must come together to perform a **thorough cross-check**. The following method recommended by ICAO in Doc007 seems to work the best:

- One pilot reads the waypoint/coordinates, bearing and track from the FMS.
- On the master document, the other pilot will circle the waypoint to signify the insertion of the

correct FULL coordinates in the navigation computers

- The circled waypoint number is ticked, to signify the relevant track and distance information matches
- (In flight) The circled waypoint number is crossed out, to signify that the aircraft has overflown the waypoint.

[fancy_box box_style="default" icon_family="none" color="Accent-Color" border_radius="default" image_loading="default"]

Cognitive Traps:

Expectation Bias is when your perception is influenced by your preconceptions. It is vital that the second crew member crosschecks **from the FMS/CDU** to the master document – and not vice versa – thereby increasing the chance of spotting an error.

Pop-up trip hustle – It's one thing reading about waypoint verification, but it's another thing actually sitting down and taking the time to do it. Do not be tempted to crosscheck your own work because you're in a time crunch – it requires at least **two separate sets of eyes**.[/fancy_box]

3) Initialisation of navigation systems

The navigational integrity of your entire flight is predicated on an accurate starting position. Even a small error with on the ground can translate into a gross error later down the line in flight.

The FMS GPS position and your current parking coordinates (found on the 10-9 pages) must match. Avoid using "last position" function in the FMS – if you were towed overnight, the "last position" will be your previous location, not your current one! Sounds obvious, but mistakes happen.

Inertial systems, once aligned, must also complement the GPS coordinates. Initialisation of inertial navigation systems can take between 6-15 minutes, and errs on the longer side at more northerly latitudes – so be patient! Moving the aircraft during alignment **will cause an alignment error. Bottom line: avoid repositioning/towing the aircraft during alignment, even it is to a nearby spot on the same ramp area.** Position errors like this cannot be corrected once in flight.

4) Your Master Clock - (iPhones not authorised!)

Since our ETAs for oceanic waypoints must be accurate within +/- 2 minutes, it is vitally important that, prior to entry into the NAT HLA, your master clock is accurately synchronised to UTC. ICAO Doc007 has a list of approved sources from which you can set your aircraft master clock (and your iPhone isn't one of them!). You are approved to use the GPS time which can be found in the FMS.[fancy_box box_style="default" icon_family="none" color="Accent-Color" border_radius="default" image_loading="default"]

Cognitive Trap:

Close to the E/W Greenwich line or close to the equator, you'll just be on the fringes of the opposing segment. So, take a close look at the E/W or N/S letter coordinates, especially if you are usually accustomed to flying from one particular geographic area.[/fancy_box][heading]Clearances & Communication[/heading]With a move away from spoken communications and towards datalink procedures, requesting, copying and verifying a clearance becomes a much simpler task! But it is still important to know your own limitations in the rare instance that you need to copy a clearance via voice.

Casual radiotelephony should be avoided

Casual radiotelephony can be the source of misunderstanding coordinates or clearances, and so all waypoint coordinates must be read back in detail, adhering strictly to standard ICAO phraseology. An example of standard ICAO phraseology requires enunciation of every individual digit. 52 North, 030 West would be read back as “Fife two north, zero tree zero west” as opposed to “fifty-two north thirty west”. Have no doubt about it, Shanwick can be the most strict in this regard.

Distractions and workload

If your departure airport is close to the oceanic boundary, e.g. Shannon or Miami, the benefit is that you will copy your oceanic clearance on the ground. Unencumbered by distractions typically associated with being in flight, you can focus almost fully on the task at hand. However, most flights pick up an airborne clearance, and it is important to **prioritise this for a period of low workload**.

Take the example of a Bombardier Global Express crew that narrowly avoided a GNE after copying a clearance. While they were in the midst of crosschecking the clearance with the FMS *and* climbing to their initial altitude, the flight attendant approached them with an issue. Instead of waiting, one of the pilots attended to the problem. A new waypoint wasn't entered, and it was later caught by ATC in a position report. **Try to avoid non-vital tasks until ALL the steps regarding copying, verifying and inputting a clearance are complete.**

Following these simple standard operating procedures (SOPs) step-by-step will guard against clearance errors. If the steps are interrupted for any reason, start again from the beginning.

- Two pilots monitor and record the clearance. The Pilot Monitoring (PM) will contact clearance delivery, while Pilot Flying (PF) monitors both the primary ATC frequency and the clearance delivery frequency.
- The PM then records the clearance on the master document. The PF also copies down the clearance separately.
- Clearance is read back to ATC. *Any disparities between both pilots' interpretations of the clearance must be clarified with ATC.*
- A deliberate cross check of the clearance to the filed flight plan and the FMS is made.

Re-Clearance

According to ICAO Doc007, *“In the event that a re-clearance is received when only one flight crew member is on the flight deck...changes should not be executed...until the second flight crew member has returned to the Flight Deck and a proper cross-checking and verification process can be undertaken.”* Sorry, they just don't trust you to do this by yourself, and neither should you!

Errors associated with re-clearances, re-routings and/or new waypoints continue to be the most frequent cause of GNE's. Therefore, a re-clearance or amended clearance should be treated virtually as **the start of a new flight** and the procedures employed should all be identical to those procedures employed at the beginning of a flight.

- Both crews note the re-clearance

- Reply to ATC via ACARS or voice
- Amend the Master Document
- Load the new waypoints into the FMS from the updated Master Document
- One pilot verifies the input of the new waypoints reading **from** the FMS
- Verify the new tracks and distances, if possible
- Prepare a new plotting chart/re-plot in Jeppesen EFB

With datalink, you might have the capability to load the new route directly from the ATC message into your FMS flight plan. This will eliminate a transcription error on your part, but you cannot always count on the FMS to load this seamlessly. Oftentimes, if a revised coast-in waypoint doesn't connect with your originally planned domestic airspace airway, it might cause a discontinuity. Worse, some crew have experienced their entire domestic flight plan drop out, left with only the oceanic portion.

Conditional Clearances - There's always a catch!

A conditional clearance is an ATC clearance given to an aircraft with certain conditions or restrictions, such as changing a flight level based on a time or place. Conditional clearances add to the operational efficiency of the airspace, but are commonly misinterpreted by flight crews.

Shannon has been known upon first VHF contact to provide lateral conditional clearances on coast-in. For example: "N135AC, *after* DINIM, direct ELSOX". Often, crew have been known to read back the *correct* transmission, but then execute the wrong procedure by proceeding directly to ELSOX.

Why is this happening? In studies of linguistics, **verbs** (such as 'direct') have been noted as having a perceptual priming effect, that more **easily grabs our attention** at the expense of weaker prepositions (such as 'from' or 'after'). Listen carefully for prepositions. Similarly, in aviation vernacular, the word 'direct' means to proceed **now** to the specified waypoint. As pilots, we can distinguish this meaning with very little effort, and most of the time can expect to proceed present position direct. Thus, we are *primed* to go direct.

While this isn't a complex sentence, research indicates that transmissions involving serial recalls (such as "proceed here *then* here...") are susceptible to distortion, with the last word or item more commonly interfering with recall of the previous item.

A really simple way to prevent this is to **write down** clearances as they are being read to you, *then* read-back the transmission. You can also call attention to a conditional clearance by prefixing their read-back with the word "Verify" or "Confirm" over the radio. Via datalink, sufficient care always must be taken when factoring in all the contents of a clearance before acknowledging the message. The initial phrase "MAINTAIN FLIGHT LEVEL 300" is included to stress that the clearance is **conditional**. If the message is about to time out, and you need more time to process its contents, reply using "Standby". Respond at your own pace!

Cognitive Trap:

On the longer route segments between New York and Santa Maria, "when able higher" (WAH) reports might be solicited. ATC acknowledgement of a WAH report must not be misconstrued as a conditional clearance to climb. Any climb clearances will be issued **separately** from a WAH acknowledgement.

10-minute Check - put the (Bad) Elf on the shelf for this

One of the best ways to capture a potential GNE and refresh your situational awareness is with the sublimely simple 10-minute check. Ten minutes after waypoint passage, you'll use your current coordinates to plot your position on your plotting chart. If the coordinates don't land on the plotted track line, an investigation into the source of the error must begin immediately. It doesn't hurt to even make additional plots between waypoints too, but ICAO only requires the one 10-minute check.

Today, more pilots are carrying independent GPS units in their flight bags, providing crew with own-ship on their oceanic route map. Tempting though it may be to use this for present position information, it is currently not an approved source of navigation, and should **NOT** be used in lieu of a 10-minute check.[fancy_box box_style="default" icon_family="none" color="Accent-Color" border_radius="default" image_loading="default"]

Cognitive Trap

It is easy to forget about the 10-minute check. Setting a timer once your waypoint passage tasks have been completed will help remind you to do so.[/fancy_box]

Autopilot mode - "Wait, are we supposed to be in heading?"

Incorrect autopilot mode selection has been known to be a factor in GNE's. On an oceanic crossing, you can bank on being in NAV or LNAV most of the way across the Atlantic. But perhaps you used heading mode to deviate for weather or to intercept a SLOP. It is not uncommon among pilots to spare your passengers two steep banking turns (thanks LNAV!) by manually flying a SLOP intercept in heading mode. But if you forget to re-engage LNAV, you will continue drifting on your merry way, further and further off course.

Distraction, fatigue or complacency are common reasons for losing mode awareness, so the following simple tricks will help mitigate autopilot induced GNE's.

- It helps to **verbally announce** when you are transitioning temporarily into heading mode, to bring both pilots in the loop.
- Employing **sterile cockpit** until you're back in LNAV will help mitigate distractions.
- In an abundance of caution, you can keep a **finger** on the heading button or heading dial until you are back in LNAV will serve as a reminder.

[fancy_box box_style="default" icon_family="none" color="Accent-Color" border_radius="default" image_loading="default"]

Cognitive Trap:

The flight mode annunciators (FMA's) are the most reliable indicators of automation selection - more so than the flight guidance panel! Yet, a study found that pilots pay superficial attention to the FMA's during critical mode changes. Don't waste a valuable resource, and do consciously **bring the FMA's into your scan**.[/fancy_box]Deliberate cross-checking and monitoring are a critical last line of defense for which we, as pilots, don't get explicit training, but are nevertheless expected to perform effortlessly. But over the North Atlantic, there is little room for error. So, let's recap what can be done!

1. **Allow sufficient time on the ground to set up**
2. **Closely scrutinise data entry - whether the source is human or ACARS!**

3. **Work together on waypoint verification**
4. **Don't work single pilot - always keep all crew in the loop**
5. **Deal with clearances and re-clearances methodically**

Understanding our vulnerabilities is key to the process of mitigating errors. Armed with an understanding of our own limitations, and an appreciation for the practices and habits mentioned above, a 'would-be' GNE can be averted.

Links

ICAO Doc 007

Global Operational Datalink Document (GOLD)

Three-day French ATC strike this week

David Mumford

5 February, 2020



French ATC strike alert! And this one's going to be a MONSTER!! Notams have now been published confirming this week's strike will last for three whole days, from 1800z on Wednesday Dec 4 until 0500z on Sunday Dec 8.

It's part of a nationwide strike which will also impact ground handling services at airports nationwide. Initially called by public transport unions opposed to the government's pension reforms, various other unions have since pledged to join the strike, including public sector workers, teachers, postal workers, hospital staff, firefighters and lorry drivers. Many unions have warned that strikes might run until Christmas, but for now, air traffic controllers have only planned strike action for three days this week.

In the Eurocontrol teleconference on Monday Dec 3, managers said they expect en-route regulations will

be applied across all sectors – which means **big delays pretty much everywhere**. If you can avoid France during this period, do so.

The situation at the airports is slightly more complex. The worst staff shortages are expected to happen at the ACC level, rather than at the local airport level. However, there are some airports which are expected to have some issues:

LFPG/Paris Charles De Gaulle: On the morning of Thursday 5th Dec, there will be an airport firefighter strike between 07-12 local time (06-11z). As a result, only one runway will be available for this period, so significant delays are expected all morning, particularly if weather conditions aren't so great.

LFBO/Toulouse & LFBD/Bordeaux: High delays expected all three days

LFBP/Pau, LFBT/Tarbes, LFBZ/Biarritz, LFMD/Cannes, LFOP/Rouen, LFQQ/Lille: Smaller airports mean possible closures, particularly at night. For these and other smaller airports, ATS services may not be provided at all at certain times – and you'll probably need to check the airport's own Notams for any signs of that.

Additionally, the government has stepped in and decided to request the **airlines to reduce their schedules by 20%** between 05-23z on December 5th at these airports: LFOB/Beauvais, LFPG/Paris Charles De Gaulle, LFLL/Lyon, LFML/Marseille, LFBO/Toulouse, LFBD/Bordeaux. The Notam confirming that can be found [here](#).

As usual with these French strikes, **Algeria** and **Tunisia** have both said their airspace can be used by flights trying to route around French airspace, without having to obtain overflight permits. But operators need to make sure they add their AFTN codes on flight plans! That means **don't just file your FPL to the normal Eurocontrol addresses**, but include those for Algeria (DAAAZQZX and DTTCZQZX) and Tunisia (DTTCZQZX and DTTCZRZX) – and make sure these are included for any subsequent DLA messages as well.

For real-time updates of any airspace issues once the strike has started, keep an eye on this handy French ATC webpage: <http://dsnado.canalblog.com/>

And check out our article for everything else you need to know about how to survive French ATC strikes!

Deteriorating post-election chaos in Bolivia

Chris Shieff
5 February, 2020



A single Notam for the country's largest international airport indicates there's no fuel available for a number of days. That's always a surefire sign that something pretty serious is going on.

The contested presidential elections last month in Bolivia has quickly led to **civil unrest** across the country in the past few weeks. Demonstrations, strikes, and roadblocks have resulted in **armed conflict** between opposing protesters as well as armed forces in which 32 people have died so far in what some are calling an uprising and others a coup. We're going to take a look at the cause of the unrest and how **international operators may be affected**, especially when the trucks carrying your jet-fuel to the airport are attacked.

The Escalation



Evo Morales, the long-term Bolivian President won a **contested election** in October, but evidence quickly surfaced that the results were manipulated. Protests from Morales opposers erupted when Morales refused to stand down until eventually resigning when the military "requested" he do so in the interest of stability, but not before the current unrest unfolded. He is now seeking asylum in Mexico. Three other officials who were in line to be the constitutionally defaulted interim presidents all resigned and/or fled the country. The role eventually fell upon the deputy leader of the Senate and opposing party member, Jeanine Anez, who promised to hold new elections soon. Some countries are recognizing Anez as the President, while others are refusing to do so.

Morales supporters began **countrywide protests** as he would not be included in the new elections, a move they claim to be a part of a larger military coup. Protests between the two groups and with the armed forces have led to volatility in the past month. Bolivia's constitution calls for the **new elections to be held within 90 days**.



Security

The US State Department has issued a **Level 4: Do Not Travel Advisory** for the **entire country**. State department non-emergency employees and their families have been **ordered to evacuate**. A Notam for SLLP/La Paz airport has been issued stating there is **no fuel available**. Protesters **attacked a military escorted fuel convoy** headed to the airport from a large nearby fuel plant, and **further protests have been planned to occur near the airport**. The Notam for La Paz has been pushed back three times so far and there's **no estimate of when fuel will again be available**.

"We have not had anyone going into Bolivia for well over a month," said Brian Leek, owner and CEO of FAM International Security, a global corporate security solutions firm. **"If you don't HAVE to go, don't. Simple answer.** Things have been brewing there for months and it finally burst last month."

The demonstrations and barricades have closed roads in La Paz as well countrywide highways and access to airports. **Security cannot be guaranteed**. The intervention by the armed forces has escalated quickly, with tear gas and live ammunition being fired to disperse protests resulting in deaths across many of the larger cities like La Paz and Santa Cruz.

Is It Safe To Travel Throughout Bolivia?

Due to the instability, the simple answer is: **Not right now**. Leek is advising all operators to defer travel, at least until the beginning of December or whenever the new elections are announced. With the news that elections will be held soon, there is optimism that the violent protests will decrease as Morales opposition leaders are calling for peace. However, many Morales supporters state they will **continue protests** in demand that the former president be given an opportunity to return. One international medical and travel services company received reports of clients' cars being attacked by protesters and one car being hit by an armed forces vehicle responding to a demonstration.



If you do operate into Bolivia, local ground handler, Pike Aviation, is recommending **SLVR/Santa Cruz** where fuel and full services are available and the protests in the city are minimal. **SLCB/Cochabamba** is also operating normally, but conflicts continue in the city. They also do not recommend operating into **SLLP/La Paz**. Leek couldn't agree more. "If you have to go, Santa Cruz is an acceptable substitute. Just know that security around the airport is weak. So have plans in place to protect the aircraft."

Italy nationwide ATC strike on Nov 25


David Mumford
5 February, 2020



Update Nov 22: The Italian ATC strike on Monday 25th Nov isn't going to be as bad as expected. The 24 hour strike has been downgraded to a 4 hour strike, from 12-16Z, 1-5pm local. Overflights and intercontinental arrivals exempt; other traffic may see a delay but it will vary from place to place. Primarily, it is the en-route center controllers that are striking.

ATC staff from all four ACC's across the country (LIRR/Roma, LIBB/Brindisi, LIMM/Milano and LIPP/Padova) will be on strike, plus local ATC at the following airports: LIRA/Rome, LIBR/Brindisi, LIBD/Bari, LIBP/Pescara.

Watch out if you're headed to either LIPY/Ancona or LIRZ/Perugia though - ATC at these airports will still be going on strike for the full 24hrs as originally planned, so big delays expected here.

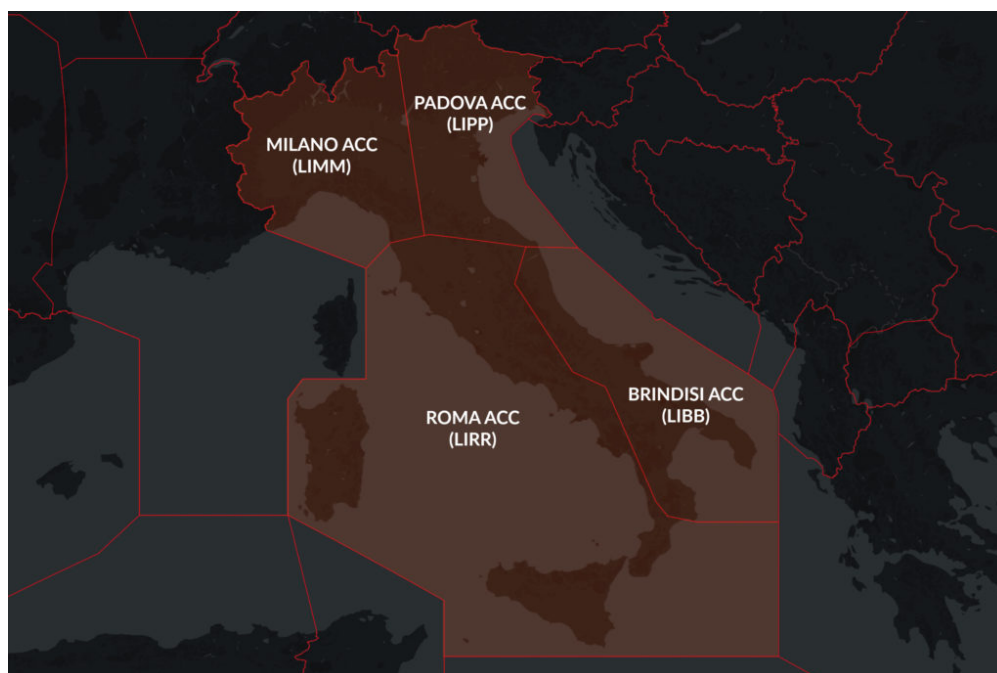

For updates, keep an eye on the Eurocontrol NOP page on the day of the strike.

Regulatory deadlines on the horizon

Chris Shieff

5 February, 2020



Regulatory compliance – nothing quite warms the heart like reading those two words, side by side. This year has seen quite a few changes in this department already (thank you, NAT HLA!), but here is a list of some other regulatory deadlines on the horizon...

Dec 31, 2019 - **Operations in North Atlantic**

- U.S. operators must have the revised LOA BO39: "Operations in North Atlantic High Level Airspace (NAT HLA)". Operators holding the old MNPS LOA BO39 will not be permitted to fly in the NAT HLA beyond this date. Requirements include: RNP10, crew training and new contingency procedures incorporated in company operating handbooks. [Read our article here.](#)

NOTICE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION

N 8900.518

National Policy

Effective Date:
7/18/19


Cancellation Date:
7/18/20

SUBJ: Operations in North Atlantic Airspace: Expiring Letters of Authorization (LOA) and New Contingency Procedures

1. Purpose of This Notice. This notice serves to remind General Aviation Safety Assurance office managers and aviation safety inspectors (ASI) of an impending deadline affecting Letter of Authorization (LOA) B039, Operations in North Atlantic High Level Airspace (NAT HLA), for Title 14 of the Code of Federal Regulations (14 CFR) part 91. This notice also requests action to notify operators holding expiring LOAs and of the existence of new contingency procedures for operations in North Atlantic (NAT) airspace.

Jan 1, 2020 - US ADS-B Out Mandate

- ADS-B Out will be required where Mode C is required AND:
- Class A, B and C airspace, Class E at or above 10,000' MSL (but not below 2,500' AGL).
- Within 30nm of Class B (Mode C veil).
- Above the ceiling and within lateral boundaries of Class B and C up to 10,000'.
- Class E over Gulf of Mexico, at and above 3000' MSL within 12 nm of US coast.

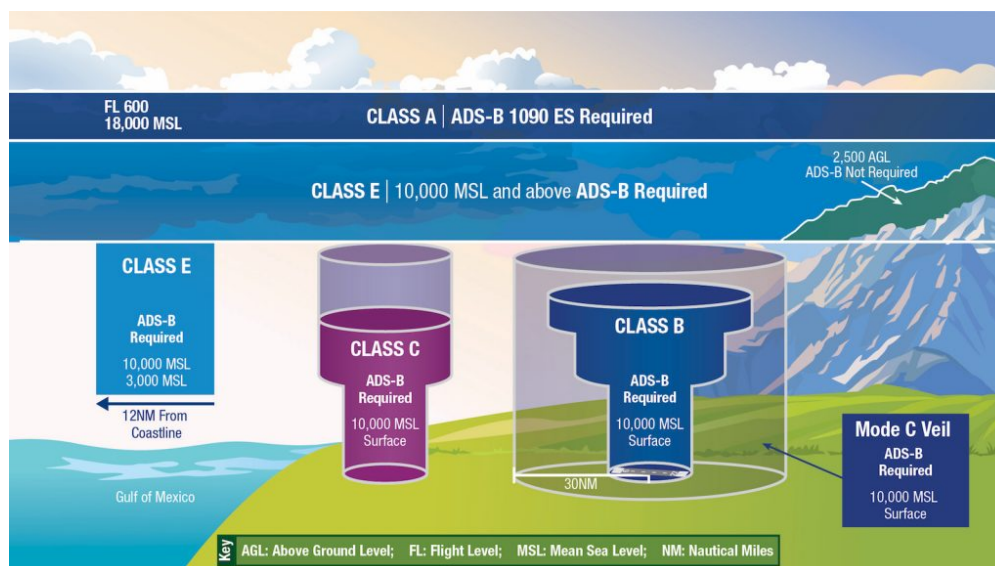

Jan 30, 2020 - Expansion of Datalink Mandate in the North Atlantic

- Phase 2C of North Atlantic Datalink Mandate. FANS 1/A CPDLC and ADS-C will be required between FL290-FL410 throughout the entire NAT region (previously FL350-390). Read our article [here](#).

Feb 5, 2020 - European Datalink Mandate

- Initially legacy aircraft flying above FL290 in European airspace were to be equipped with CPDLC capability by Feb 2015. But due to equipage requirements and technical issues the mandate was delayed to Feb 2020, **AND**, even better, **most GA/BA aircraft will be exempt from this**. Read our article [here](#).

June 7, 2020 – **European ADS-B Out Mandate**

- Aircraft flying IFR in Europe with max certified takeoff weight of more than 5700kg (12,566lbs) OR max cruising TAS of more than 250kts must be equipped with ADS-B. GPS sensor with at least WAAS accuracy coupled to a 1090 Extended Squitter transponder required.

What is the ADS-B mandate in Europe?

Commission Regulation (EU) No 1207/2011, of 22 November 2011, lays down requirements for the performance and the interoperability of surveillance for the single European sky. From 7 June 2020, all aircraft that weigh more than 5 700 kg, or have a max cruise speed greater than 250 knots, will need to be equipped with ADS-B capabilities to be operated in European airspace.

This means that by June 2020, a huge fleet of aircraft needs to be retrofitted. That represents a great business opportunity for numerous STC applicants who have experience in avionics installations. However, an ADS-B installation is much more than a “simple” change of transponder, and it may not be as easy to handle as it might initially appear.

DELAYED:

Canada: ADS-B Out Mandate

- This was planned to be implemented in Class A airspace from Feb 2021, and Class B airspace from Jan 2022. But Nav Canada has now postponed this mandate. They still plan on using ADS-B for surveillance, and this will be used on a priority basis for suitably equipped aircraft starting in 2021, but they say – “non ADS-B Out equipped aircraft will be accommodated within the airspace until a performance requirements mandate can be implemented.”

ALSO ON THE HORIZON:

August 14, 2020 – **EU: SAFA Ramp Checks & Pilot Mental Health**

- EASA regulations requiring **alcohol testing during ramp checks** will take effect across all SAFA participating countries (although some countries have already started doing this: Austria, Belgium, Czech Republic, France, Germany, Greece, Iceland, Ireland, Italy, Netherlands, Portugal, Spain, Switzerland, UK, and Singapore). Tests may also be carried out by local police at any time.
- All pilots working for European airlines will have access to mental health support programs.

- European airlines will perform a psychological assessment of their pilots before the start of employment.
-

Any other biggies that we missed? Let us know!

Venezuela issues another surprise ban on GA/BA Flights

David Mumford
5 February, 2020



On Nov 15, authorities in Venezuela issued a Notam immediately suspending all GA/BA flights from operating to airports in the country. The ban was due to remain in place until 2359z on Nov 20, but got cancelled on Nov 18.

Here was the Notam, issued by the SVZM/Maiquetia FIR:

A0842/19 – GENERAL AND PRIVATE AVIATION OPS INCLUDING REMOTELY PILOTED AIRCRAFT SYSTEM (RPAS) ARE SUSPENDED. OVERFLIGHTS CROSSING SVZM / FIR ARE ALLOWED. 15 NOV 10:00 2019 UNTIL 20 NOV 23:59 2019. CREATED: 15 NOV 04:01 2019


The last time the Venezuelan government issued a ban like this was back in Feb 2019, which seemed to be related to wider attempts by the government to limit the travel of opposition politicians. This latest ban probably had similar motivations – with Venezuela’s President Maduro calling for government supporters to march and rally across the country on Nov 16 to counter protests called for by opposition leader Juan Guaidó in Caracas on the same date.

U.S. operators have been prohibited from operating to Venezuelan airports — and from overflying the

country below FL260 — ever since 1st May 2019 when the US FAA issued a “Do Not Fly” instruction. Two weeks after that, the U.S. ordered the suspension of all commercial passenger and cargo flights between the U.S. and Venezuela, and this applies to both U.S. and foreign registered carriers.

Our advice remains the same: **you don’t want to go to Venezuela at the moment**. The official advice of both the US and Canada couldn’t be clearer, they both say the same thing: **do not travel to Venezuela** due to risks posed by the ongoing unstable political and economic situations and the significant levels of violent crime.

For overflights, here’s what we suggest...

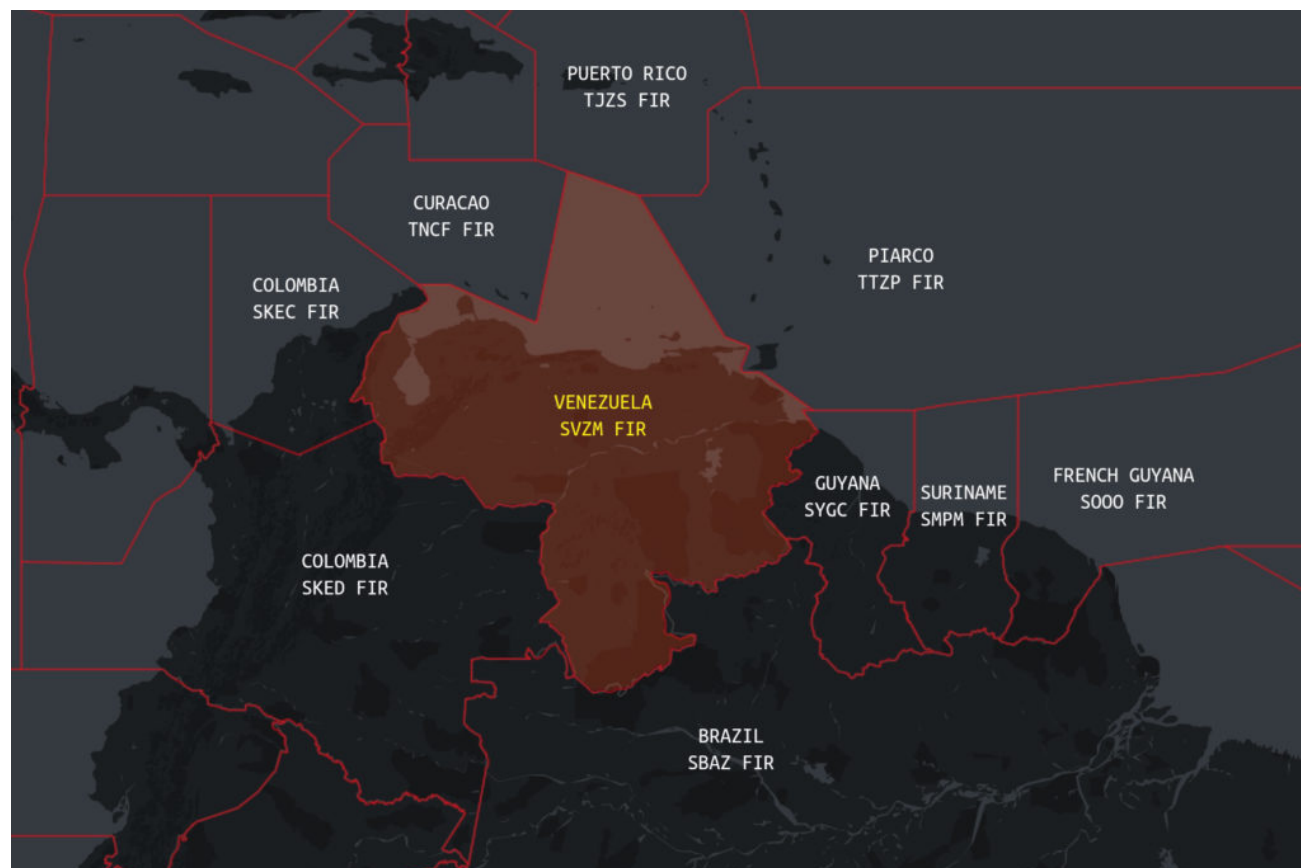

To the **WEST**

– via Colombia (SKED/Bogota FIR) – **permit required** for all overflights.

Note: watch out if planning a flight through the TNCF/Curacao FIR – although a permit to overfly is not required here, you will need to prepay for navigation fees in advance. More on that [here](#).


To the **EAST**

– via Guyana (SYGC/Georgetown FIR) – **permit not required**

– via Suriname (SMPM/Paramaribo FIR) – **permit required**

– via French Guyana (SOOO/Rochambeau FIR) – **permit required** unless operating a GA aircraft under 12.5k lbs.

If you need a tech stop and previously used/considered SVMI, then look at alternatives like TNCC, TTPP, SBEG, SMJP. Use OpsGroup’s GoCrow planning map to figure your best alternate options:

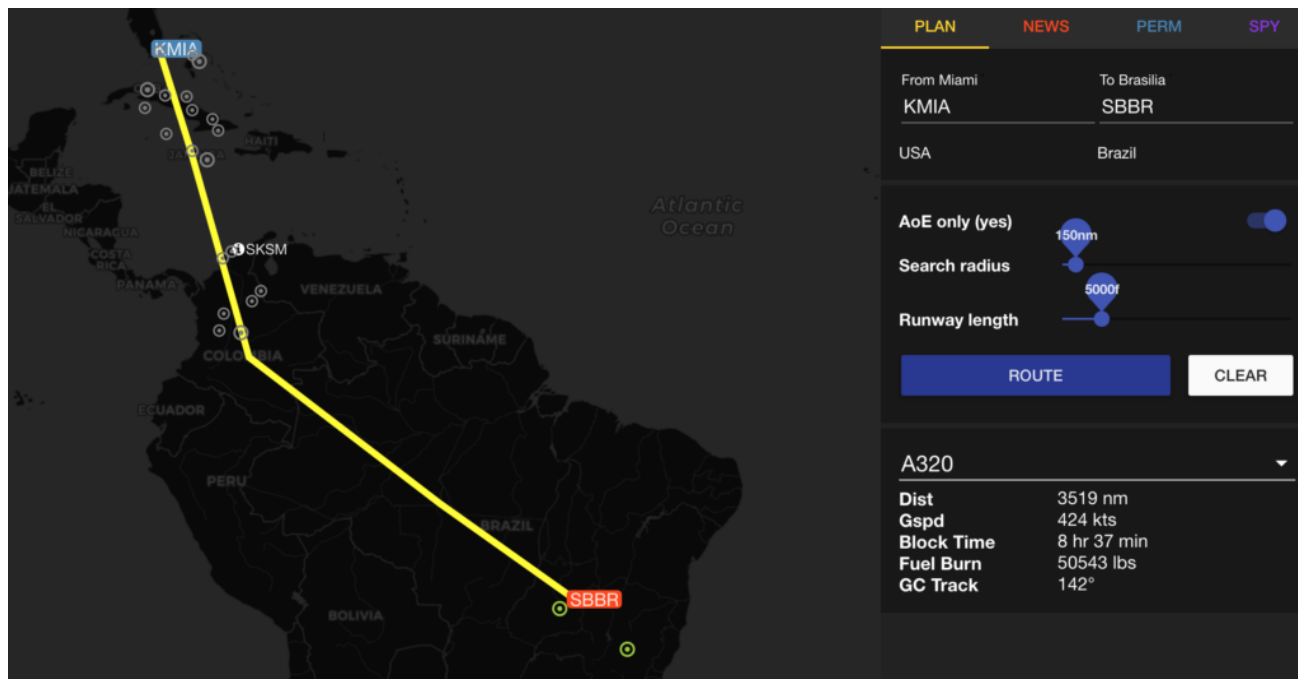

New Procedures at Nice: Beware the Big CDM Computer

David Mumford
5 February, 2020



Nice Airport will launch Airport Collaborative Decision Making (A-CDM) on Nov 25. The main impact to operators will basically be that **strict timings will have to be adhered-to for the entire start-up process**: flight clearance, engines start-up approval and parking off-block will all have to be done within strict timeframes, otherwise your flight will drop out of the CDM system and you'll likely get hit with a **significant delay**.

Top tips from local handler Swissport are as follows (we've paraphrased slightly):

Flight dispatch:


- It is now compulsory to file the flight plan so that it exactly matches the Airport Slot booked by your ground handler. If the flight plan and the Airport Slot timings are not exactly the same, **the Big CDM Computer** at the airport will get terribly confused, your flight plan will get rejected, and you won't be flying anywhere.
- As a consequence, any time you want to change your schedule you must let your handler know first! They get a new Airport Slot for you first, **then** enter your flight into the CDM system, and **then** you can change your flight plan.

Flight deck crew:

- **Strict timings** will have to be respected for the start-up process : flight clearance, engines start-up approval and parking off-block will have to be performed in due time, otherwise the flight will be *SEQUENCE OUT* and the CDM process will have to be reset, resulting in significant delays.
- **The TSAT** (Target Start-up Approval Time) is the key timing since all the departure process is based on it. Your ground handler can provide you with your TSAT, and it can also be monitored directly by the crew on the CDM website (see the attachments below on how to do that).
- The transponder is part of the process for the validation of some CDM milestones.
The transponder should be switched on before taxiing and switched off once on-block. Switching the transponder on/off during taxiing generates wrong timings in the whole process management, and the Big CDM Computer doesn't like that.

Bottom line, just make sure you **keep talking with your ground handler** throughout the whole departure process, so they can manage all these times for you in the system.

Swissport has provided a **handy guide for operators** on what to expect (click the image below to open the full version!):

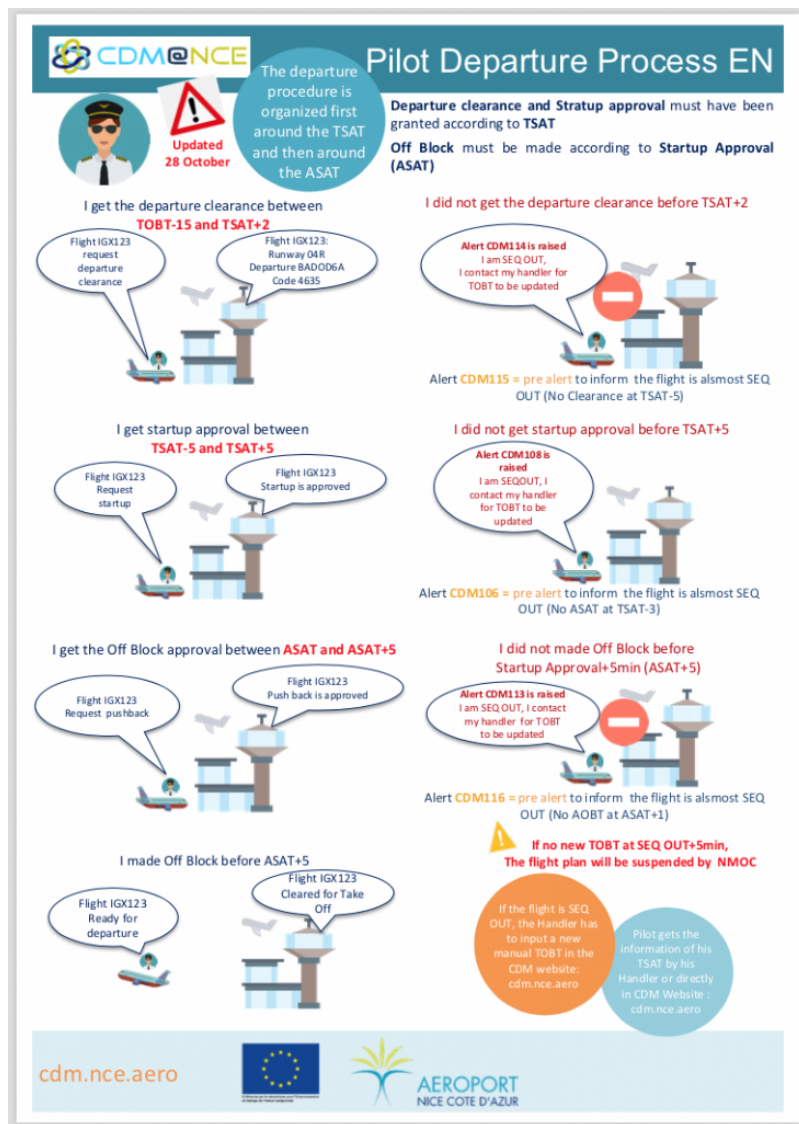

Other things worth knowing at LFMN/Nice:

- With the change to **RNP approaches only** (i.e. what would be known in the U.S. as RNAV GPS approaches), the airport is filing **violation reports** even if you request and get cleared for any other type of approach. The tip is to **double check your FMS database** before you fly to confirm all approaches are loaded, especially the RWY 04 RNAV-A and RWY 22 RNAV-D. See Airport Spy reports on LFMN for full reports.
- From March 2019, any **schedule change** (ETA, ETD, flight number, provenance or destination airport) will generate a **new PPR number** – now called “Slot ID” – that will have to be updated in the FPL, still in field 18. Bear in mind that this process will take at least 10-15 minutes to have the new schedule validated by the airport and get the new Slot ID.
- France has started a thing called CASH – Collaborative Aerodrome Safety Highlights. It's basically a selection of **briefing packages** for certain airports, drawn from information supplied by airlines, operators, and ATC. So far, they've published ones for LFBK/Bastia, LFOB/Beauvais, LFKC/Calvi, LFPB/Paris Le Bourget, LFPG/Paris Charles De Gaulle, LFMN/Nice, and LFBO/Toulouse. More info